



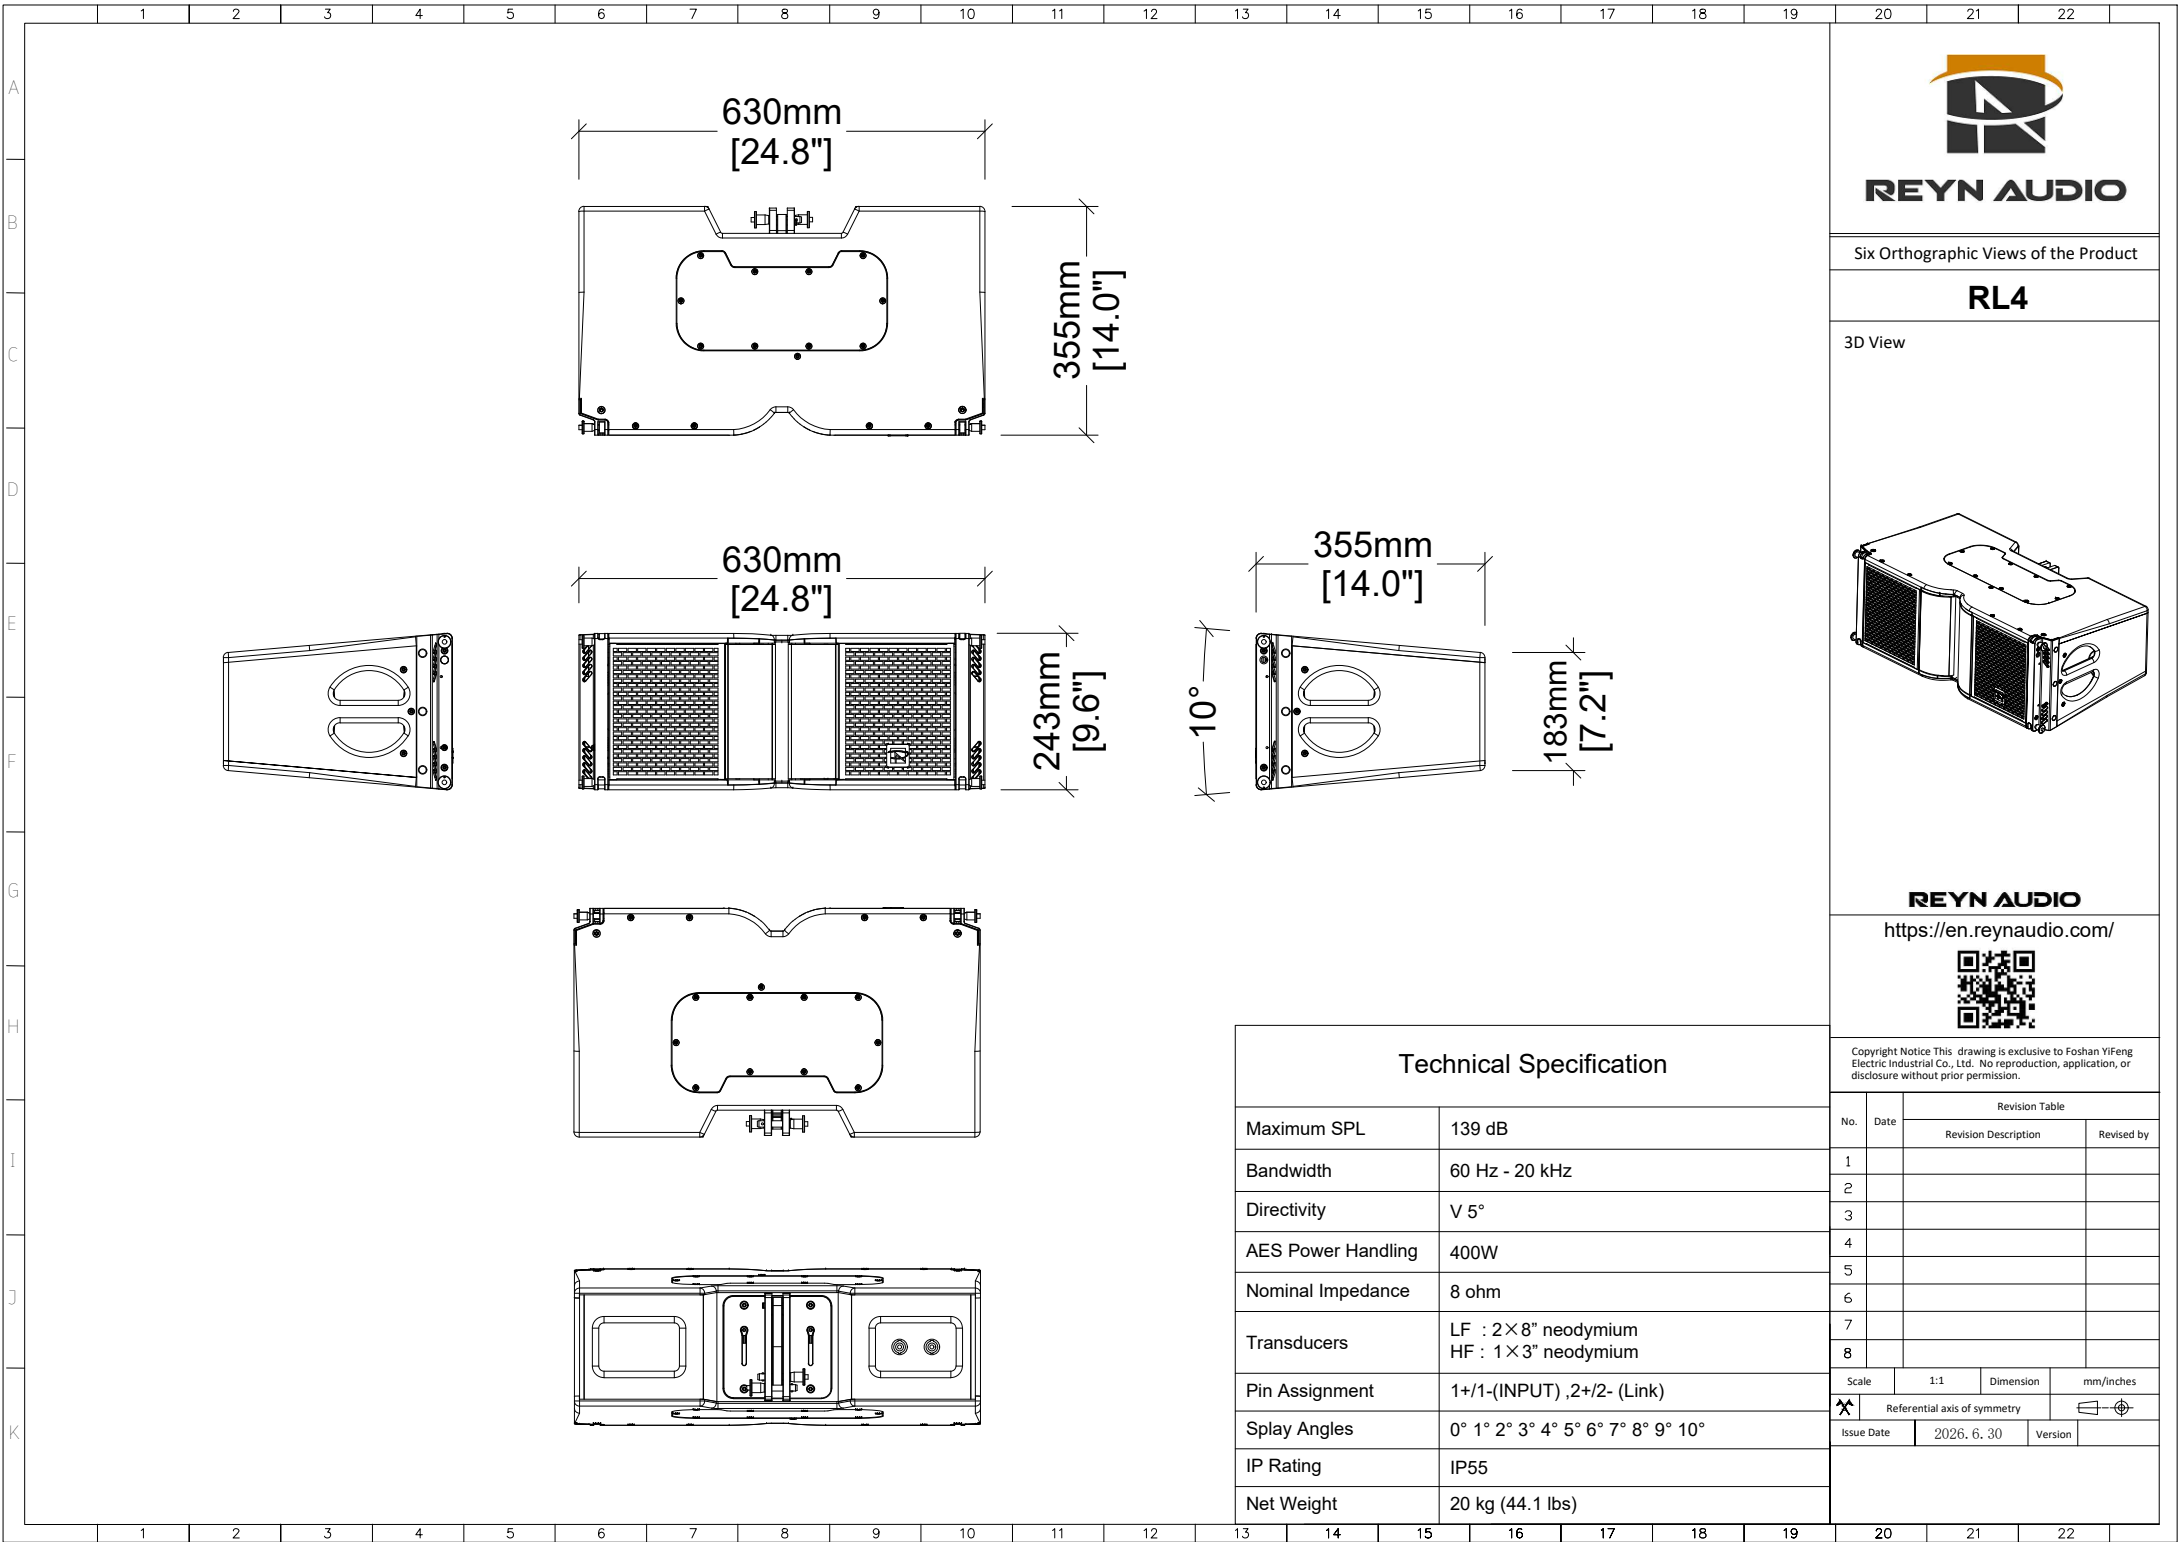

Six Orthographic Views of the Product

RL4

3D View

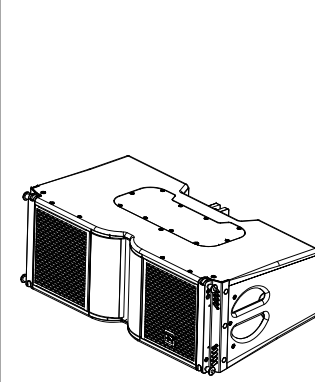

REYN AUDIO
<https://en.reynaudio.com/>




Copyright Notice This drawing is exclusive to Foshan Yifeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

Technical Specification


Maximum SPL	139 dB
Bandwidth	60 Hz - 20 kHz
Directivity	V 5°
AES Power Handling	400W
Nominal Impedance	8 ohm
Transducers	LF : 2×8" neodymium HF : 1×3" neodymium
Pin Assignment	1+/1-(INPUT) ,2+/2- (Link)
Splay Angles	0° 1° 2° 3° 4° 5° 6° 7° 8° 9° 10°
IP Rating	IP55
Net Weight	20 kg (44.1 lbs)

Revision Table			
No.	Date	Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			
Scale		1:1	Dimension
Referential axis of symmetry			
Issue Date	2026. 6. 30	Version	

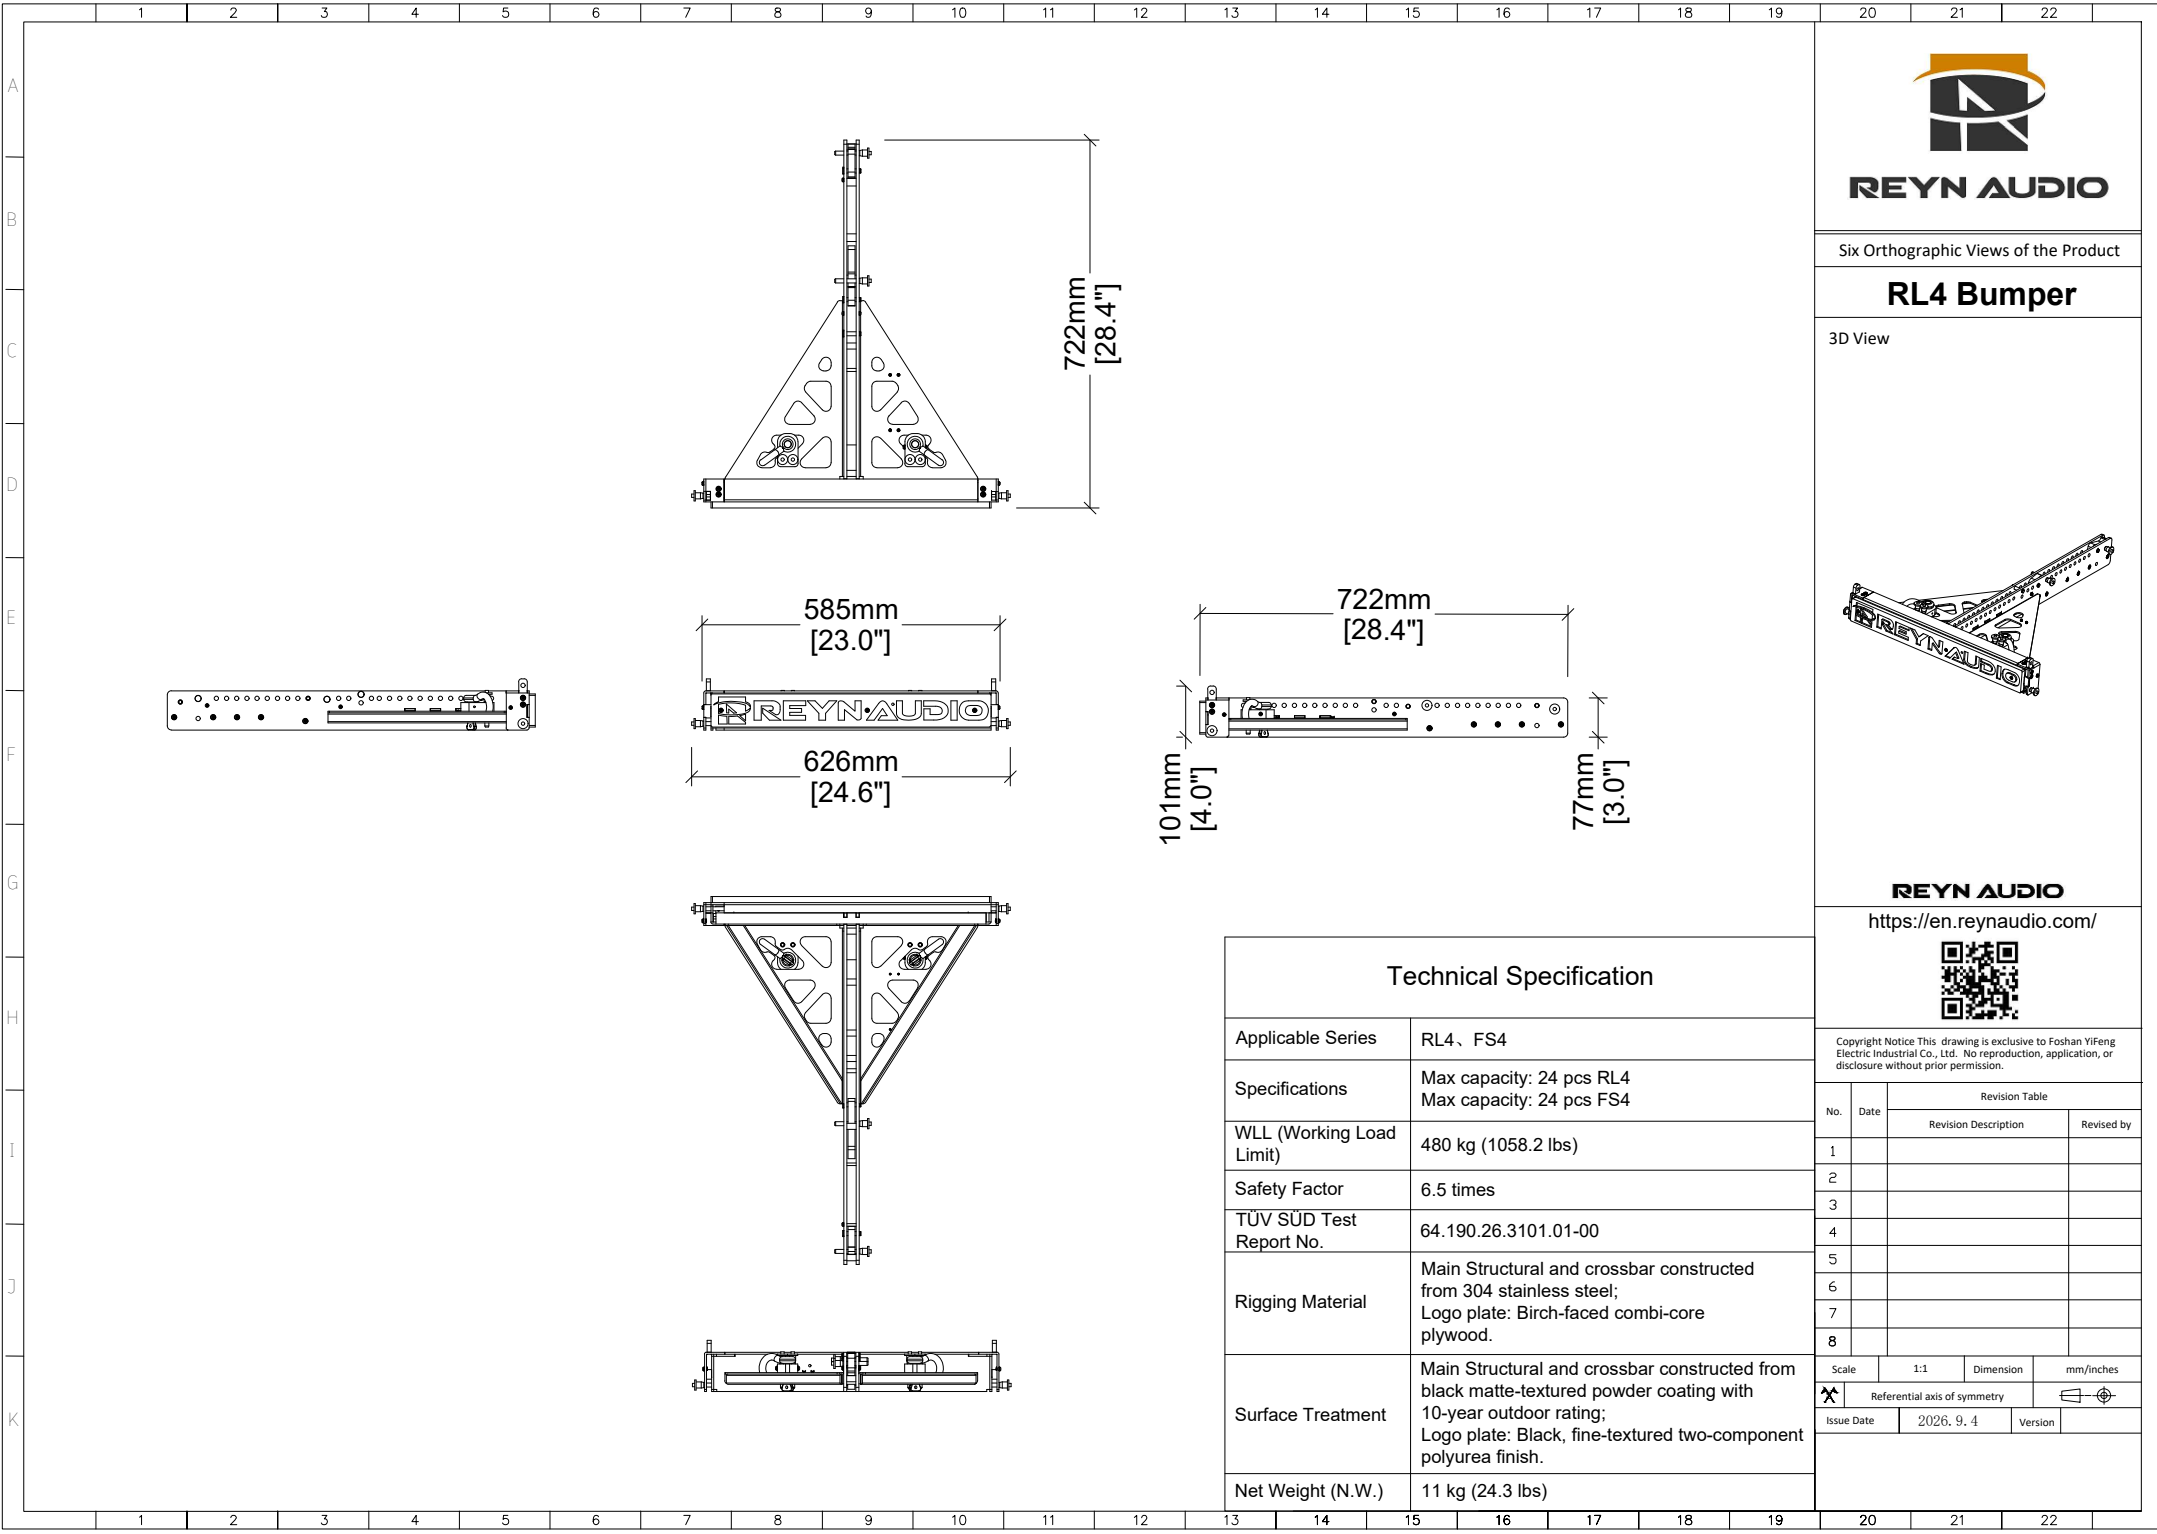

Six Orthographic Views of the Product

RL4 Bumper

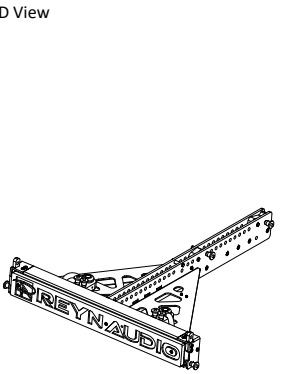


REYN AUDIO
<https://en.reynaudio.com/>

Copyright Notice This drawing is exclusive to Foshan Yifeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

Technical Specification	
Applicable Series	RL4、FS4
Specifications	Max capacity: 24 pcs RL4 Max capacity: 24 pcs FS4
WLL (Working Load Limit)	480 kg (1058.2 lbs)
Safety Factor	6.5 times
TÜV SÜD Test Report No.	64.190.26.3101.01-00
Rigging Material	Main Structural and crossbar constructed from 304 stainless steel; Logo plate: Birch-faced combi-core plywood.
Surface Treatment	Main Structural and crossbar constructed from black matte-textured powder coating with 10-year outdoor rating; Logo plate: Black, fine-textured two-component polyurea finish.
Net Weight (N.W.)	11 kg (24.3 lbs)

No.		Revision Table	
		Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			
Scale		1:1	Dimension
Referential axis of symmetry			
Issue Date		2026. 9. 4	Version

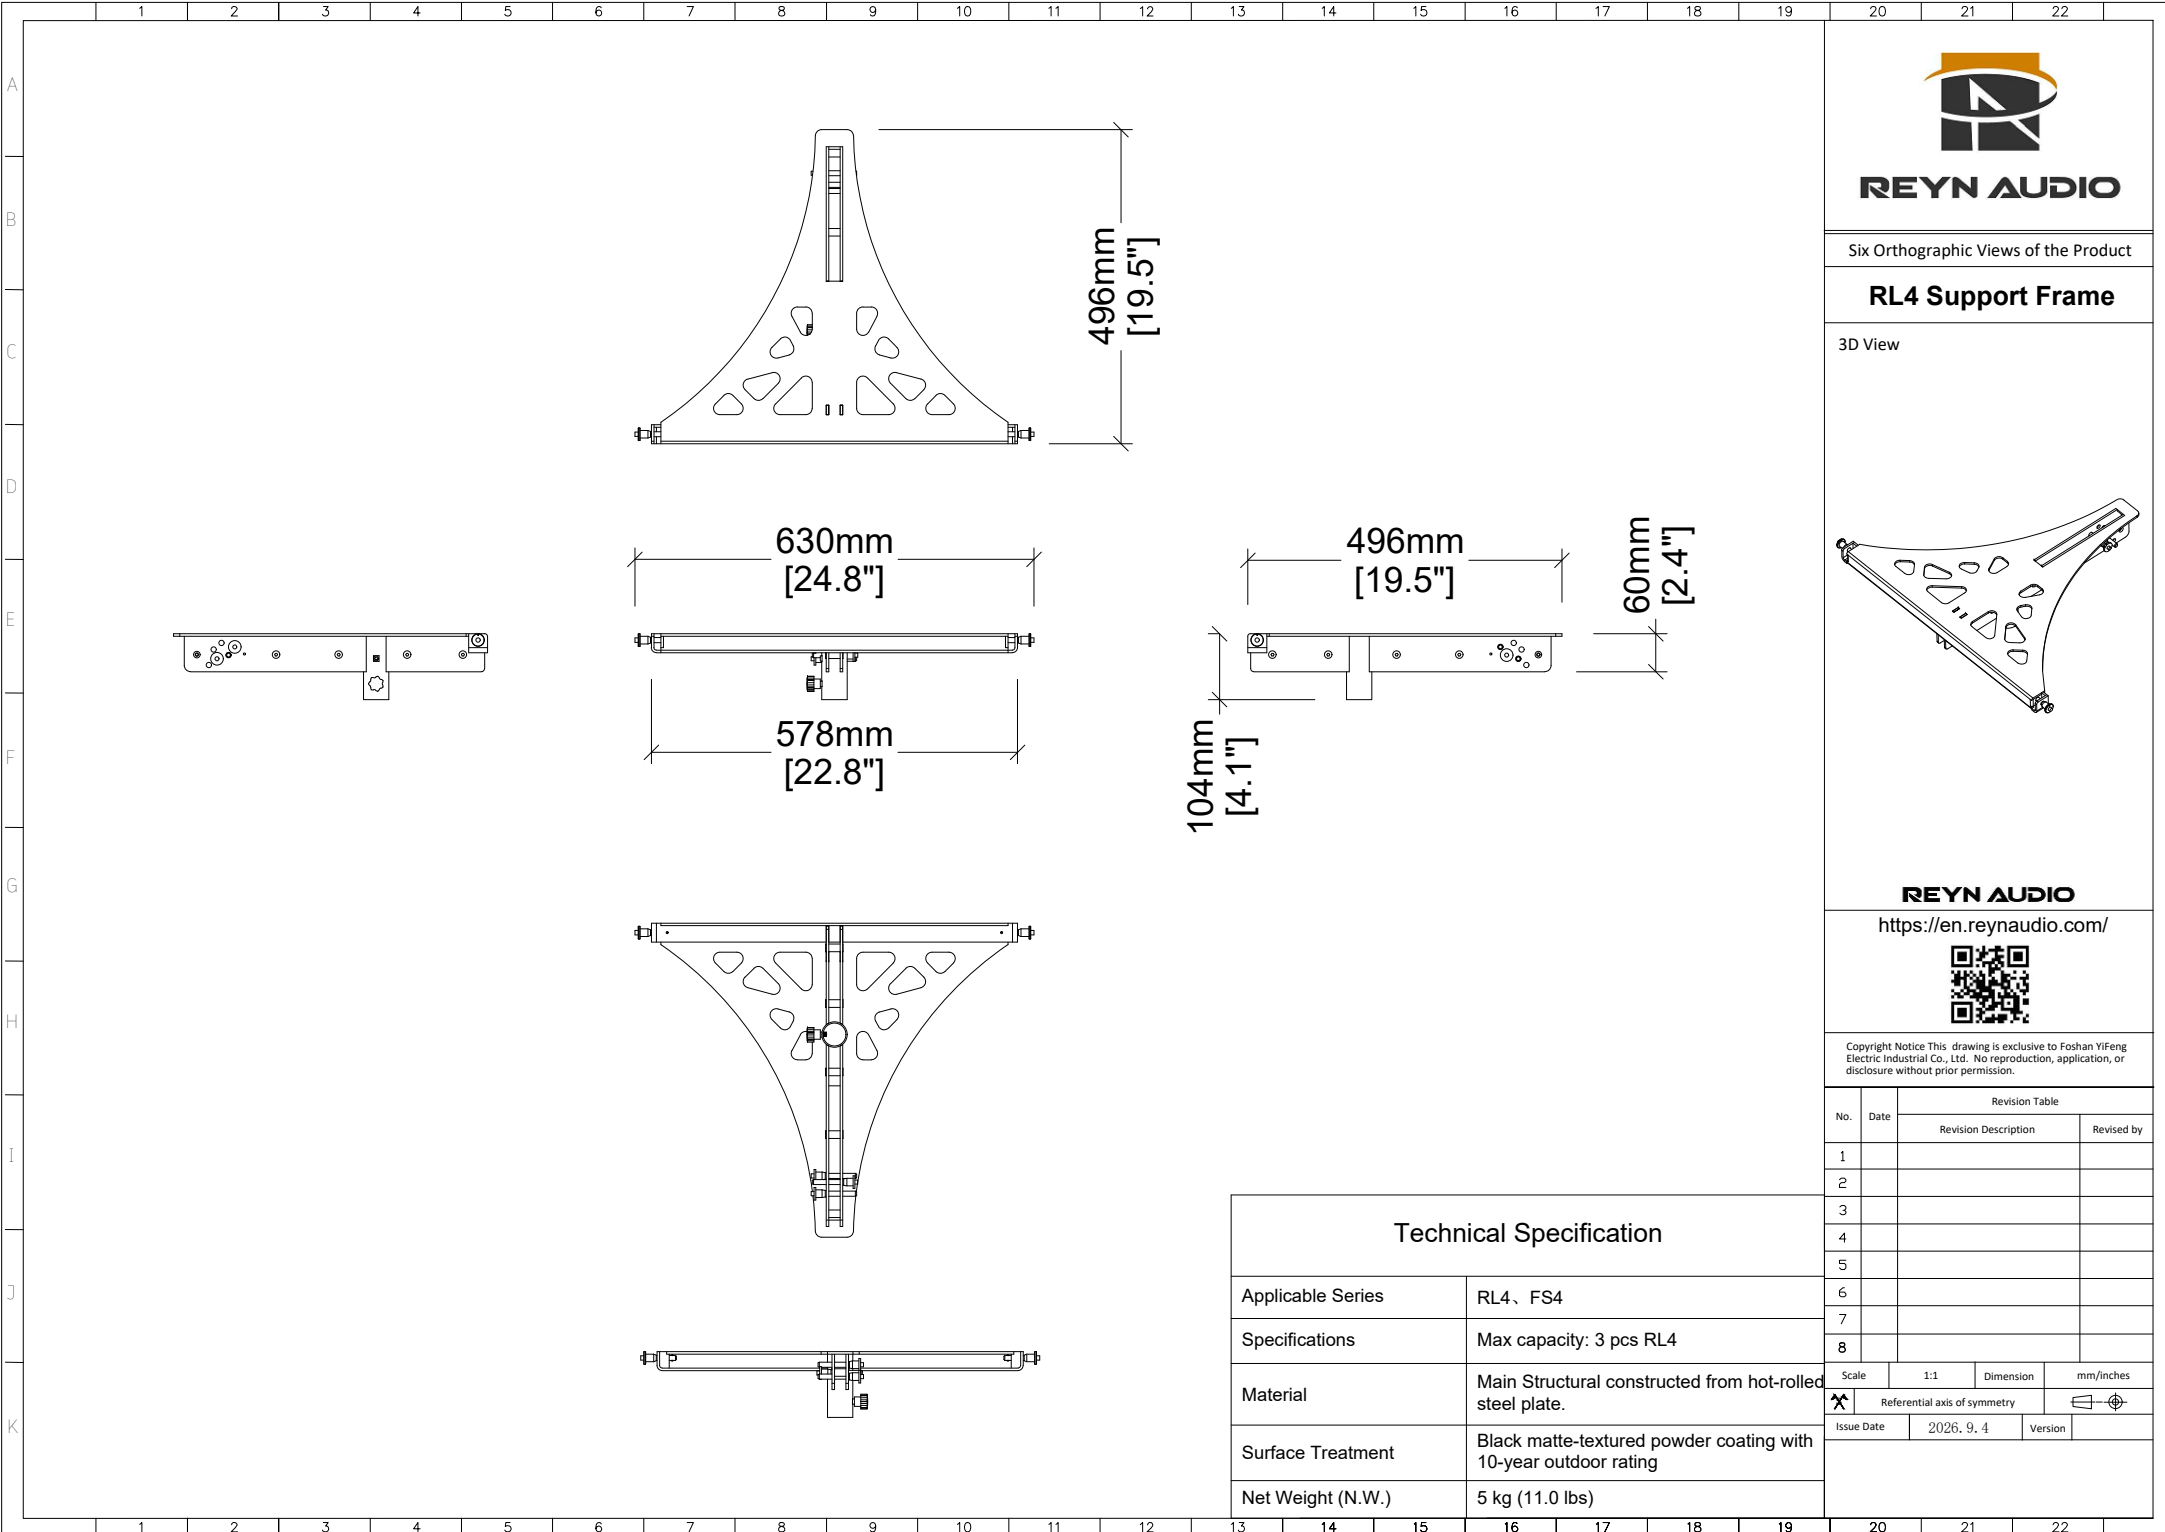


REYN AUDIO

Six Orthographic Views of the Product

RL4 Support Frame

3D View



REYN AUDIO


<https://en.reynaudio.com/>



Copyright Notice This drawing is exclusive to Foshan Yifeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

No.	Date	Revision Table	
		Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			
Scale		1:1	Dimension
Referential axis of symmetry			
Issue Date		2026. 9. 4	Version


Technical Specification	
Applicable Series	RL4、FS4
Specifications	Max capacity: 3 pcs RL4
Material	Main Structural constructed from hot-rolled steel plate.
Surface Treatment	Black matte-textured powder coating with 10-year outdoor rating
Net Weight (N.W.)	5 kg (11.0 lbs)

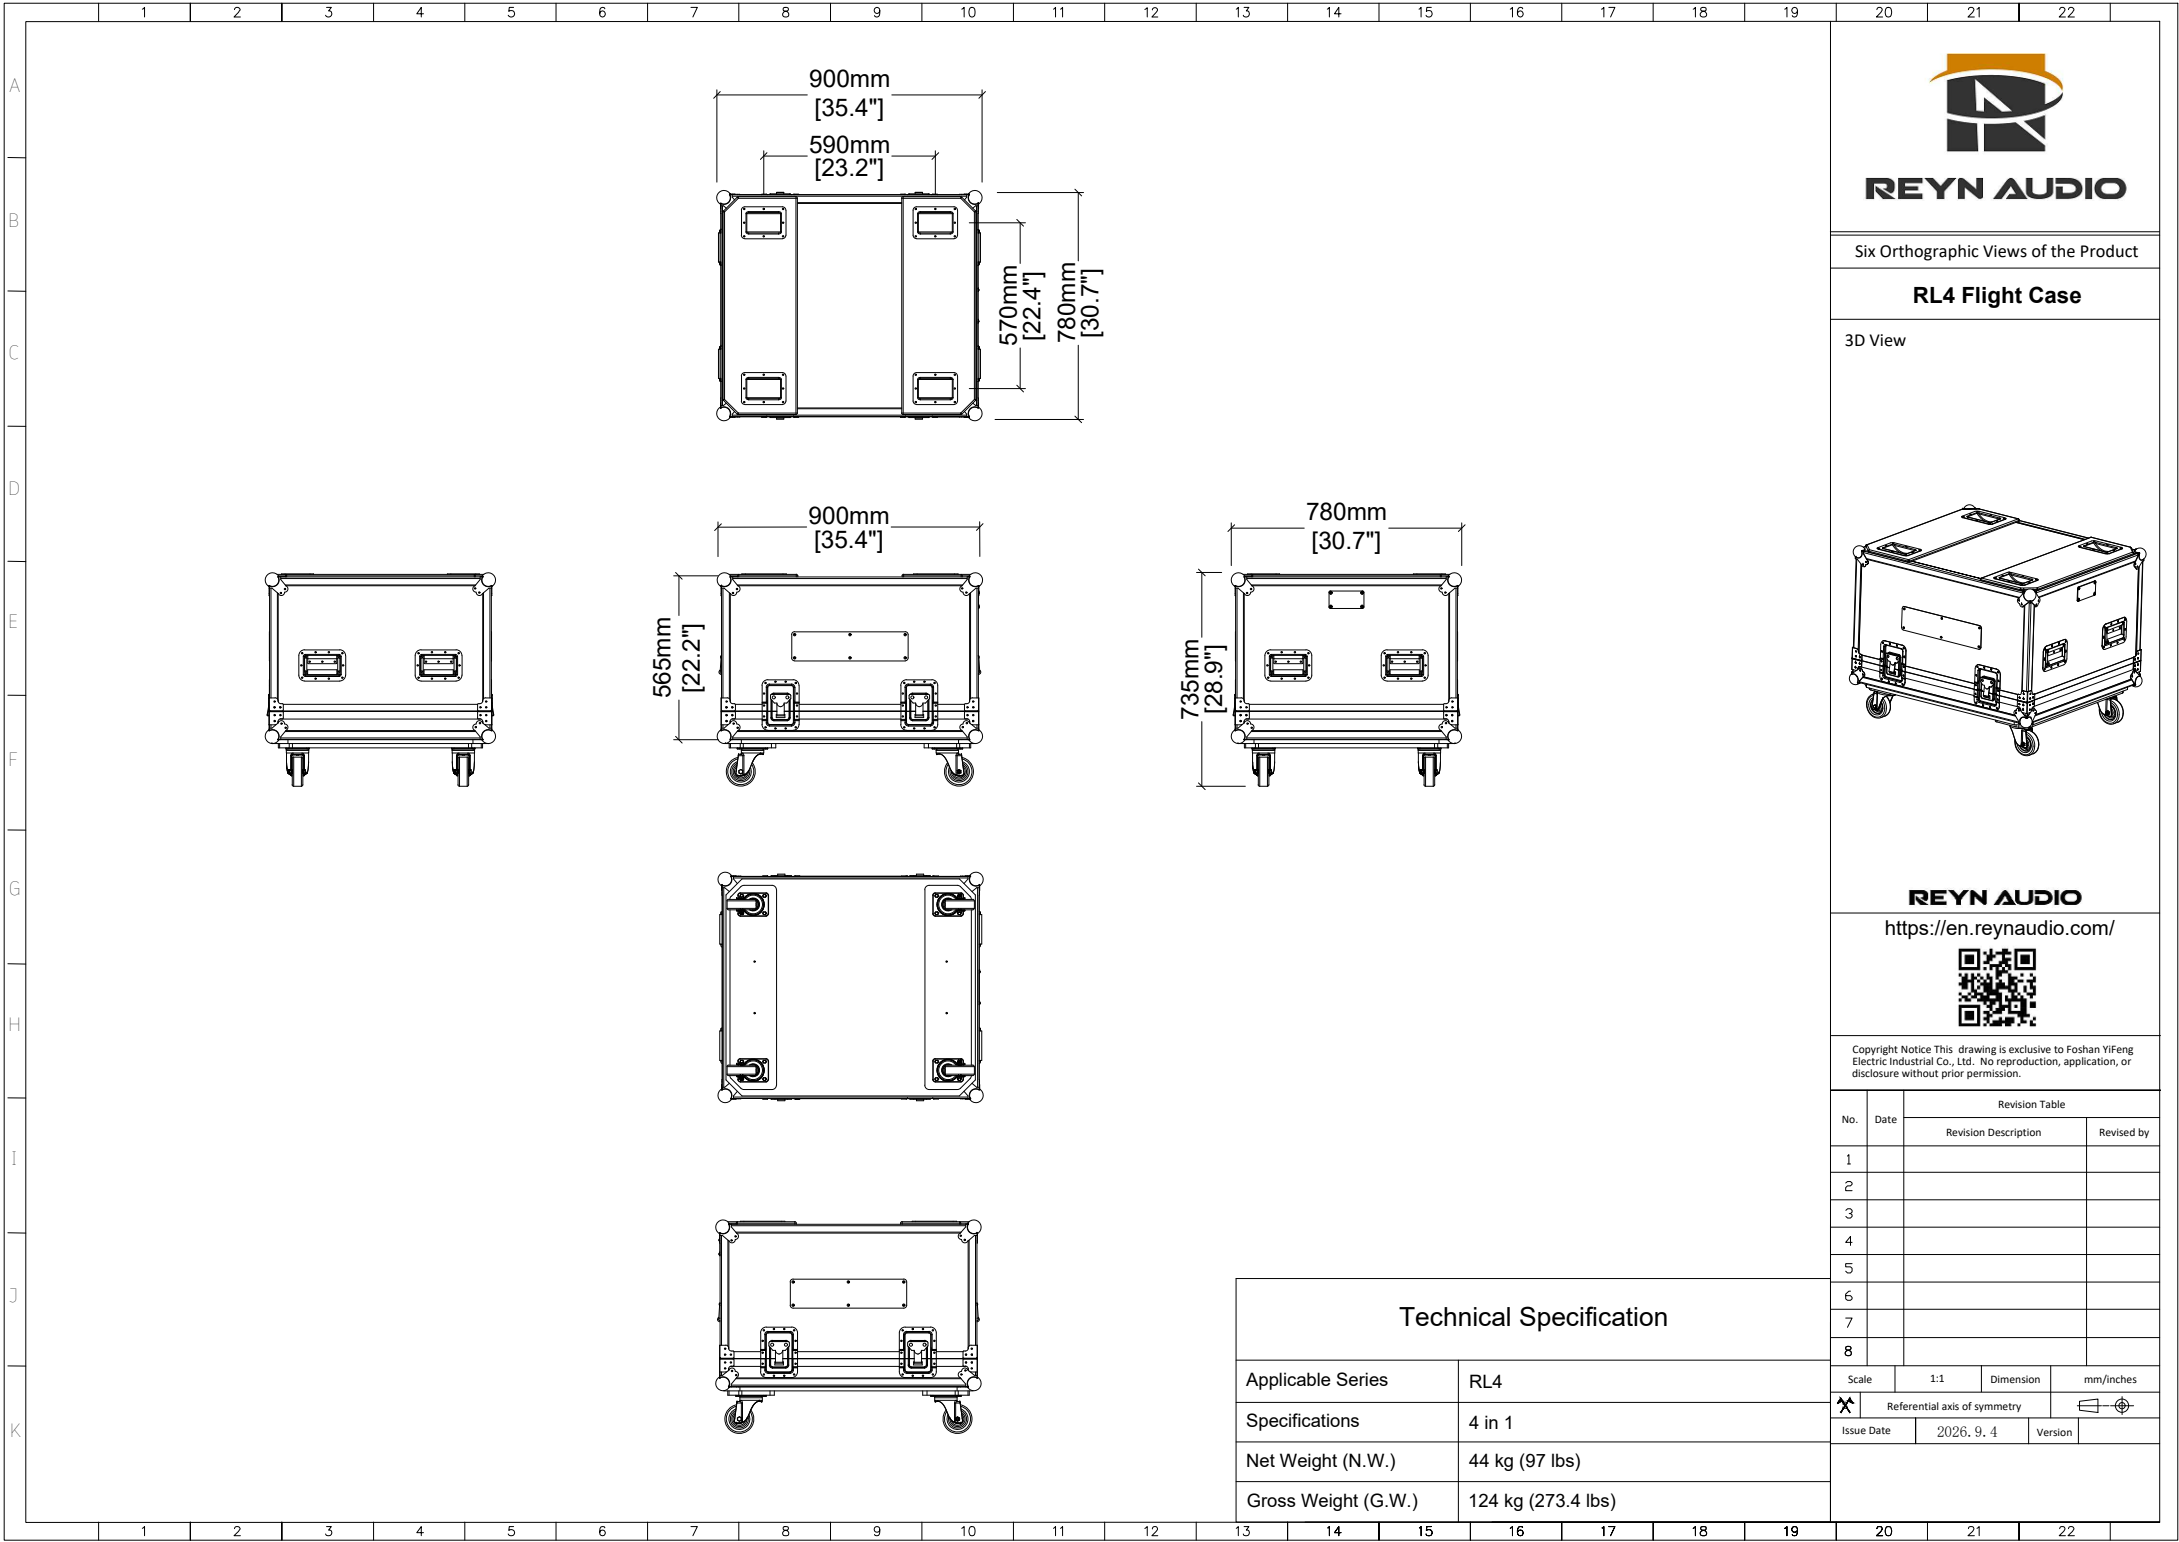

Six Orthographic Views of the Product

RL4 Flight Case

3D View



REYN AUDIO

<https://en.reynaudio.com/>




Copyright Notice This drawing is exclusive to Foshan Yifeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

No.	Date	Revision Table	
		Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			

Technical Specification	
Applicable Series	RL4
Specifications	4 in 1
Net Weight (N.W.)	44 kg (97 lbs)
Gross Weight (G.W.)	124 kg (273.4 lbs)

Scale	1:1	Dimension	mm/inches
Referential axis of symmetry			
Issue Date	2026. 9. 4	Version	

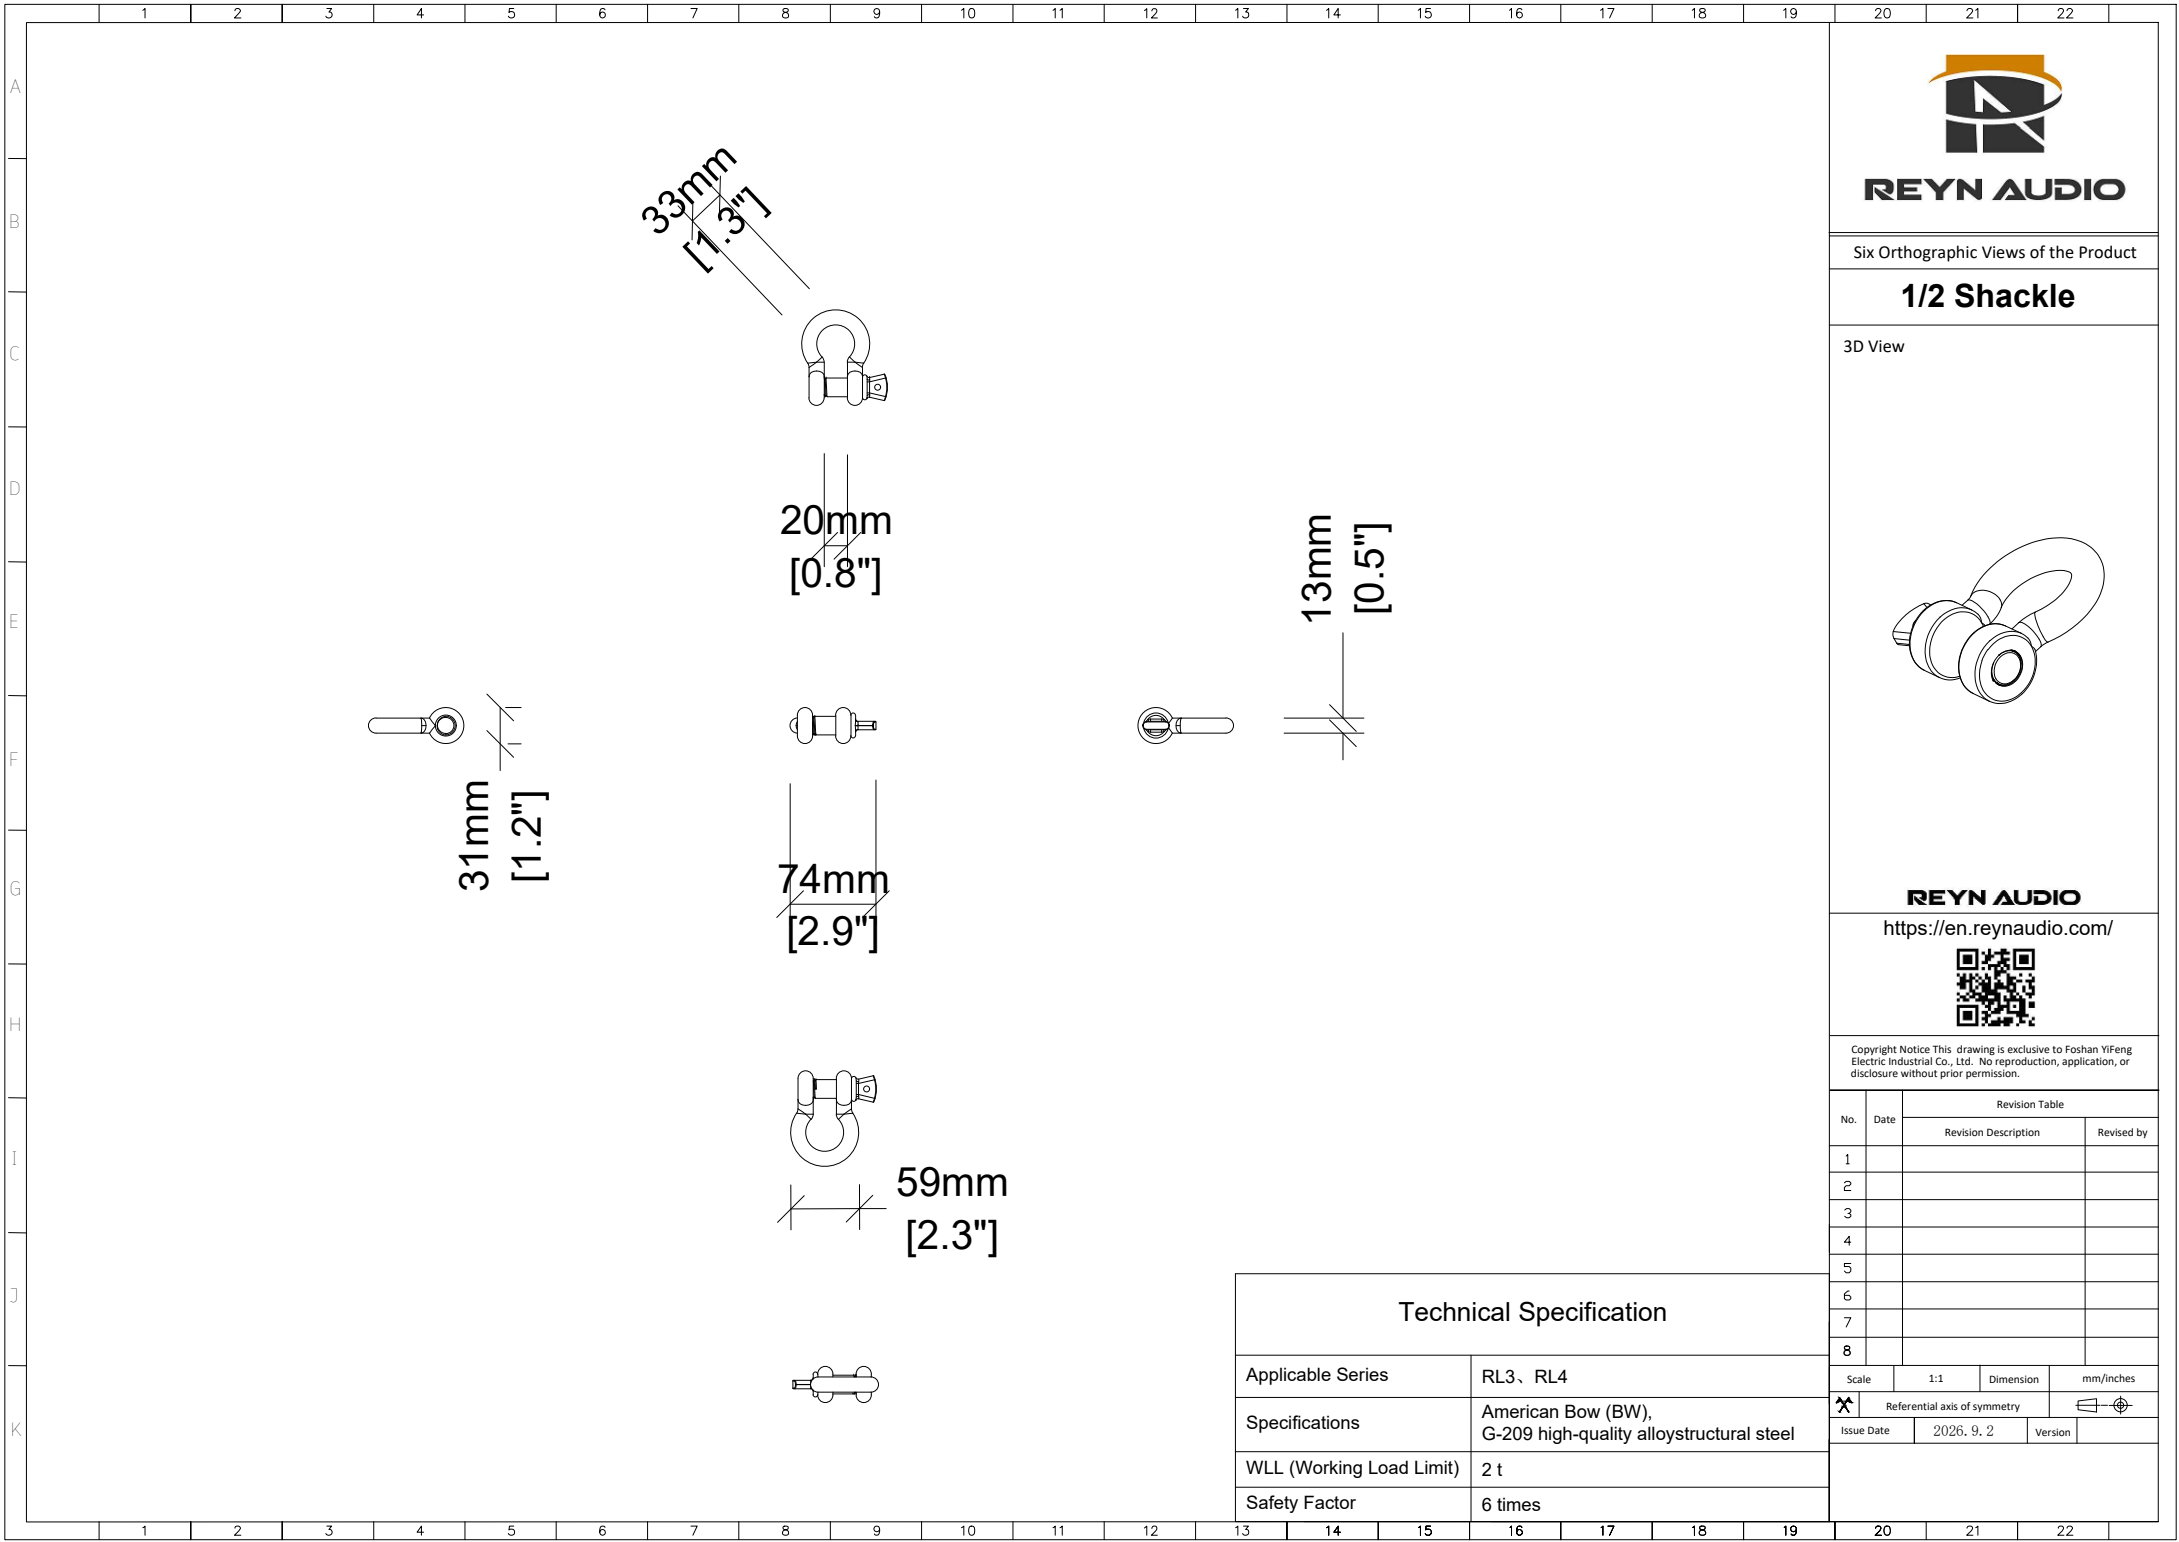

REYN AUDIO

Six Orthographic Views of the Product

1/2 Shackle

3D View



REYN AUDIO

<https://en.reynaudio.com/>



Copyright Notice This drawing is exclusive to Foshan Yifeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

No.	Date	Revision Table	
		Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			
Scale		1:1	Dimension
Referential axis of symmetry		mm/inches	
Issue Date	2026. 9. 2	Version	

Technical Specification	
Applicable Series	RL3、RL4
Specifications	American Bow (BW), G-209 high-quality alloy structural steel
WLL (Working Load Limit)	2 t
Safety Factor	6 times