



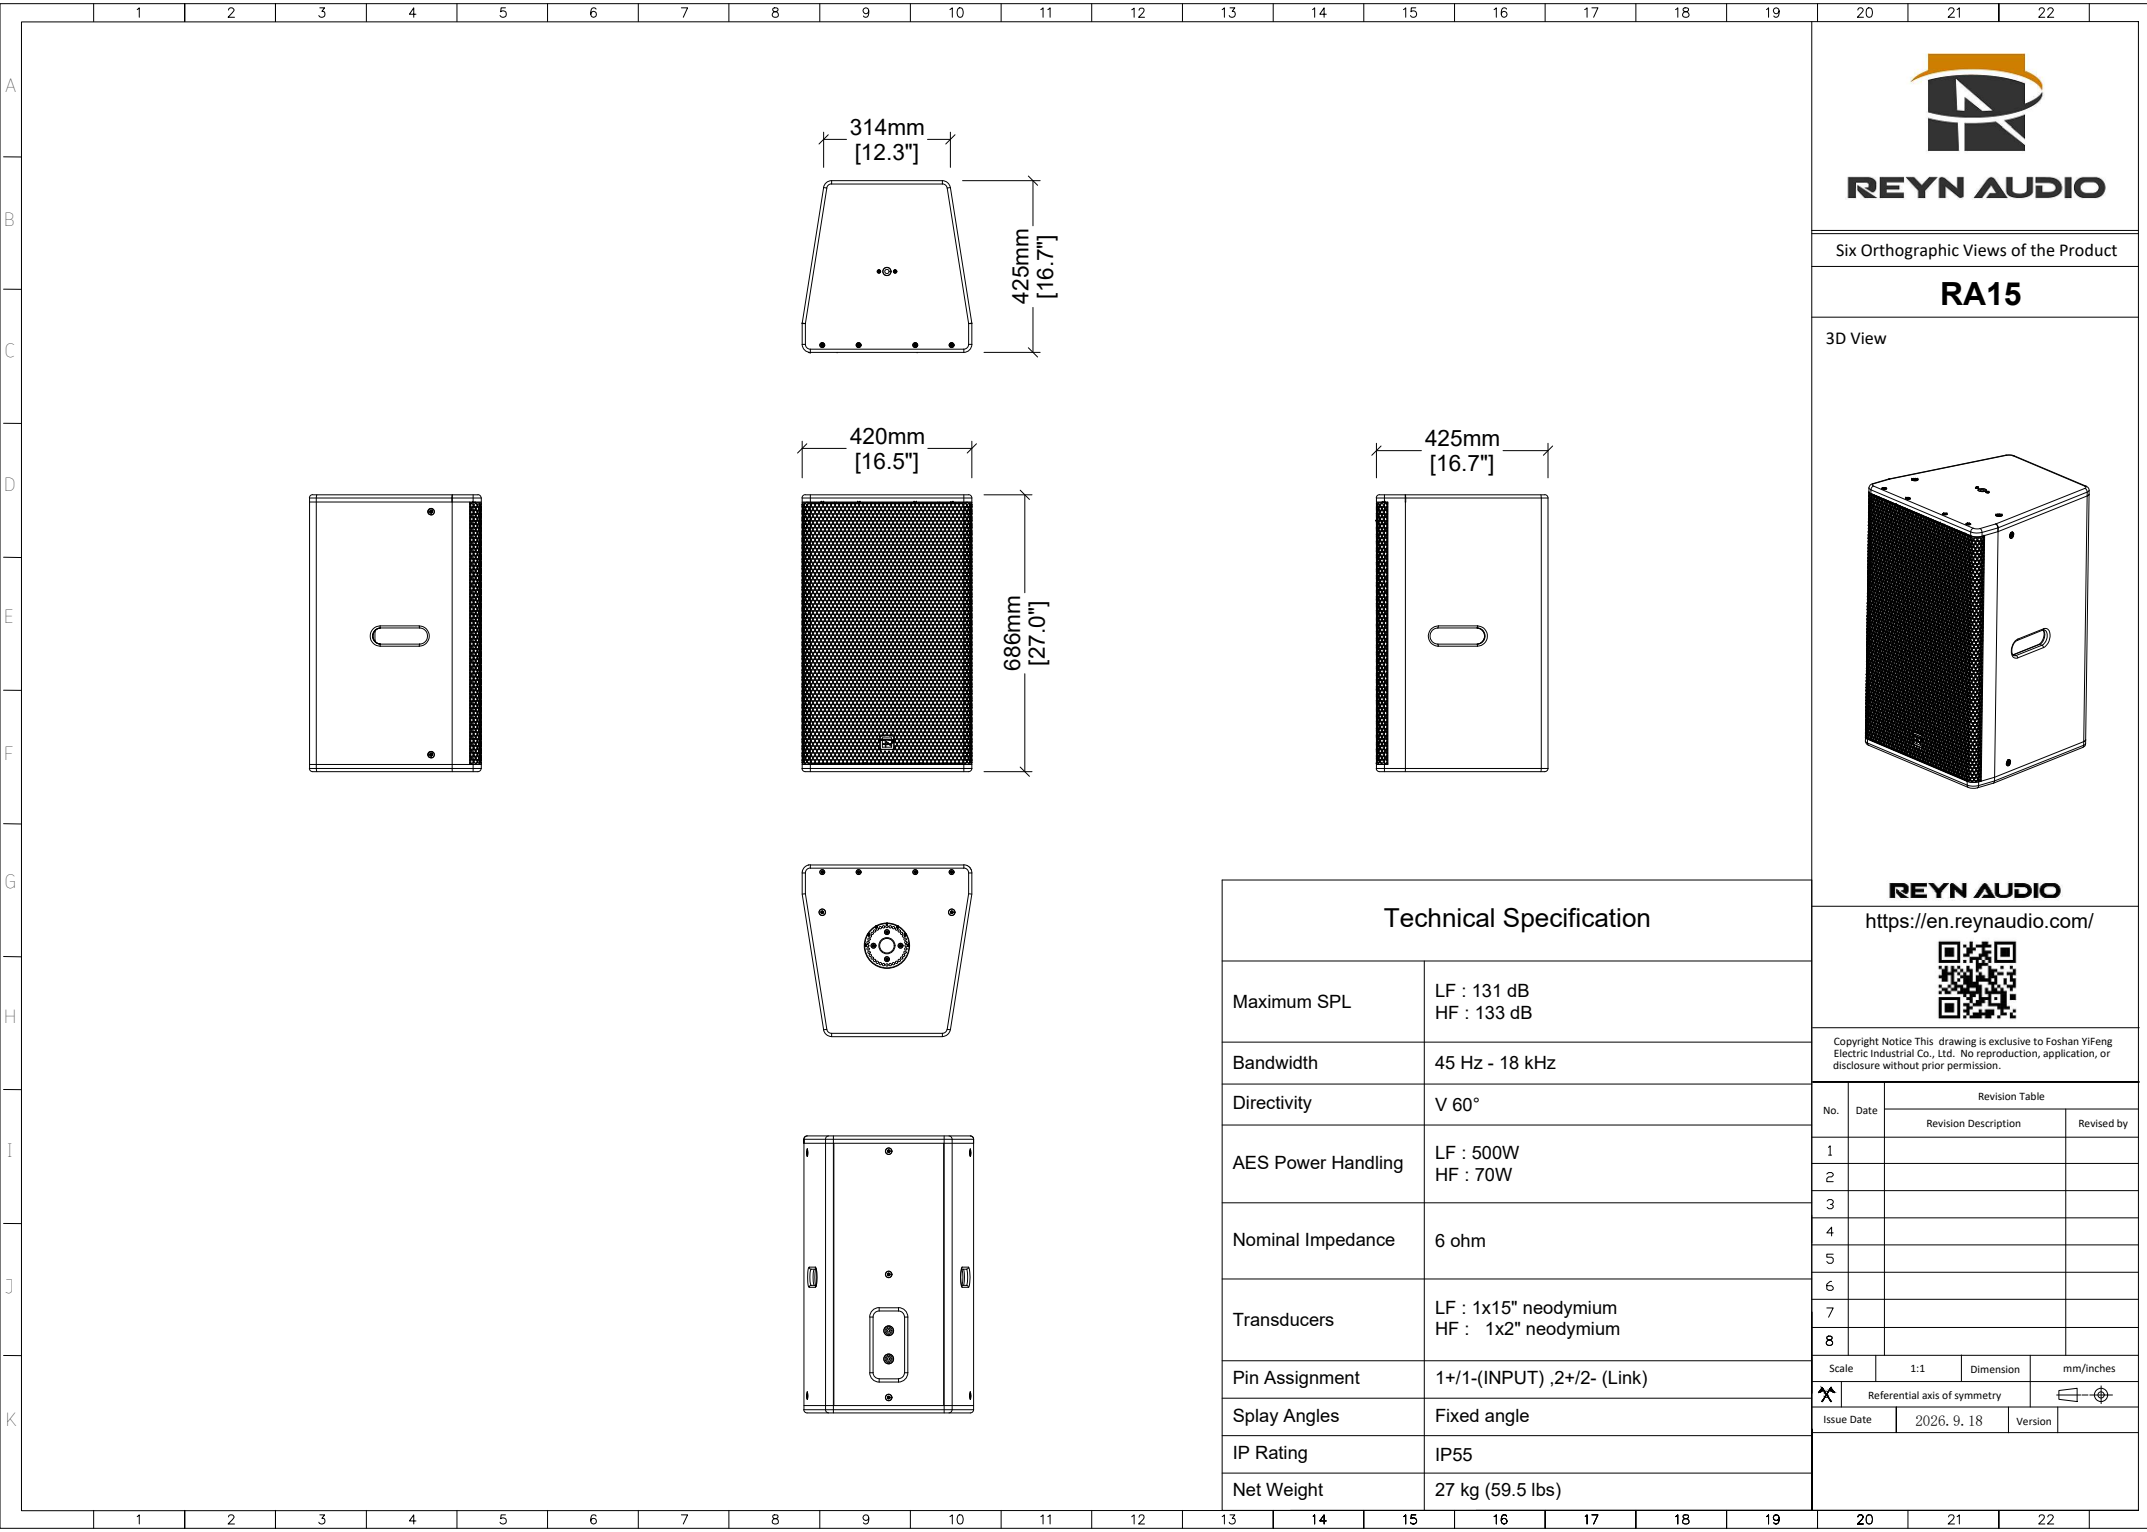

Six Orthographic Views of the Product

RA15

3D View



REYN AUDIO

<https://en.reynaudio.com/>




Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

Technical Specification

Maximum SPL	LF : 131 dB HF : 133 dB
Bandwidth	45 Hz - 18 kHz
Directivity	V 60°
AES Power Handling	LF : 500W HF : 70W
Nominal Impedance	6 ohm
Transducers	LF : 1x15" neodymium HF : 1x2" neodymium
Pin Assignment	1+/1-(INPUT) ,2+/2- (Link)
Splay Angles	Fixed angle
IP Rating	IP55
Net Weight	27 kg (59.5 lbs)


No.	Date	Revision Table	
		Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			
Scale		1:1	Dimension
		mm/inches	
		Referential axis of symmetry	
Issue Date		2026. 9. 18	Version

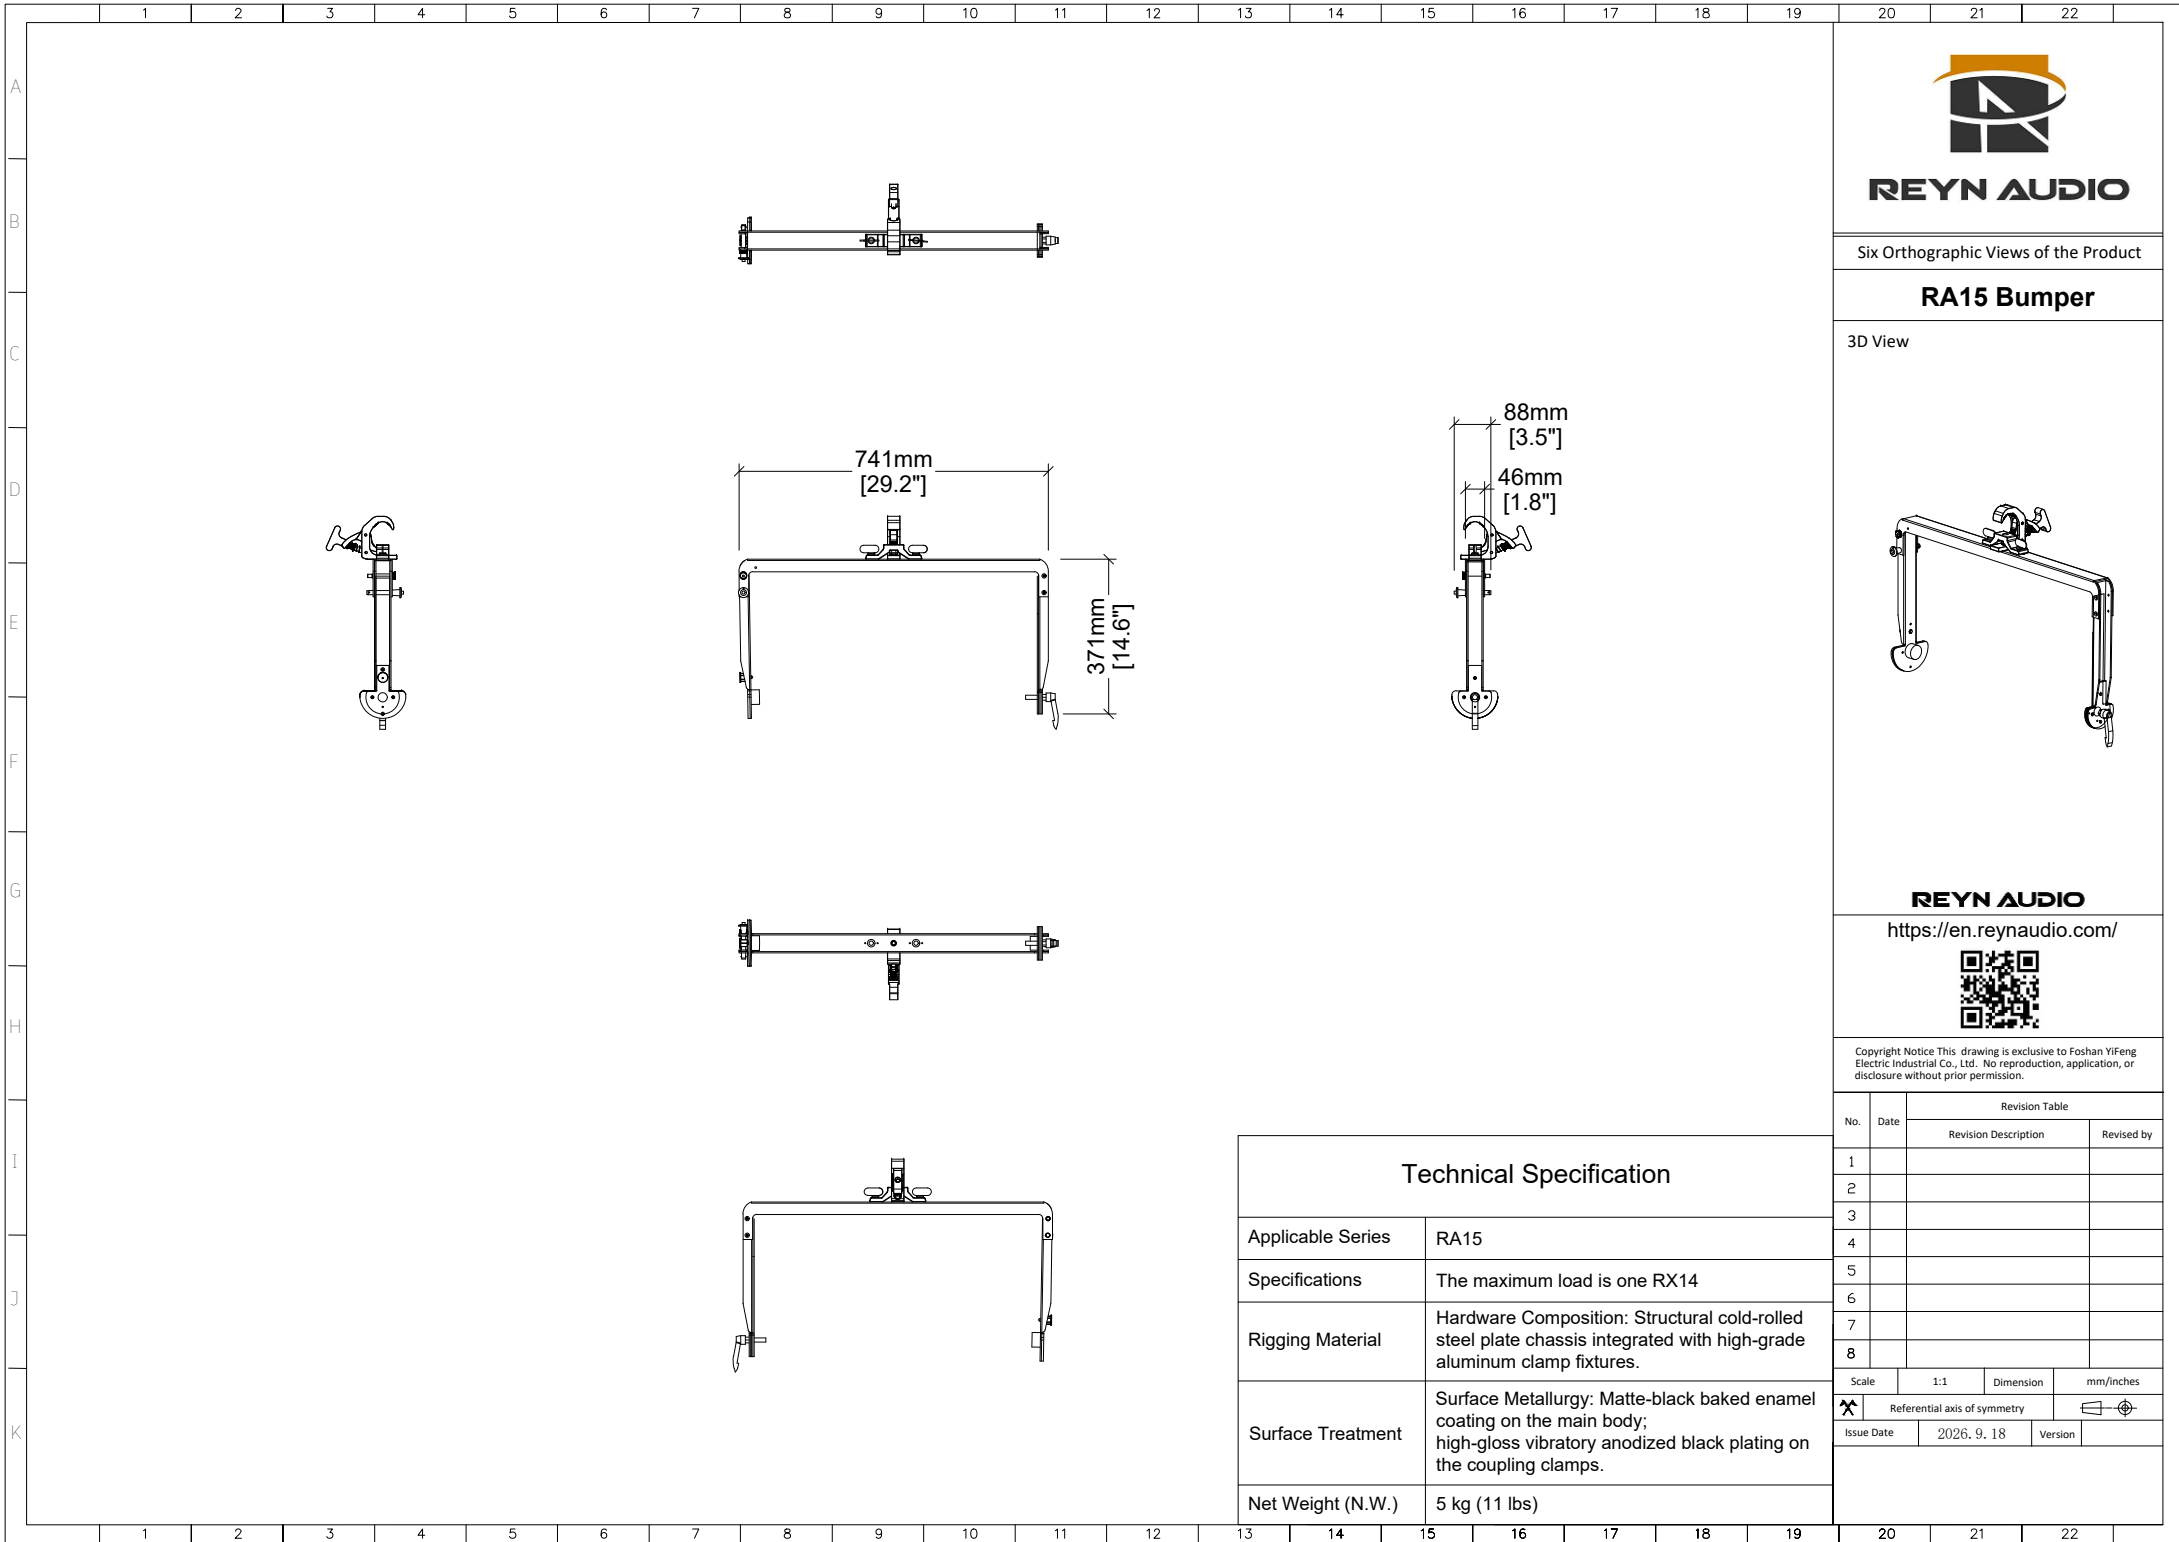

Six Orthographic Views of the Product

RA15 Bumper

3D View



<https://en.reynaudio.com/>



Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

Technical Specification	
Applicable Series	RA15
Specifications	The maximum load is one RX14
Rigging Material	Hardware Composition: Structural cold-rolled steel plate chassis integrated with high-grade aluminum clamp fixtures.
Surface Treatment	Surface Metallurgy: Matte-black baked enamel coating on the main body; high-gloss vibratory anodized black plating on the coupling clamps.
Net Weight (N.W.)	5 kg (11 lbs)

No.	Date	Revision Table	
		Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			
Scale		1:1	Dimension
		mm/inches	
		Referential axis of symmetry	
Issue Date		2026. 9. 18	Version