



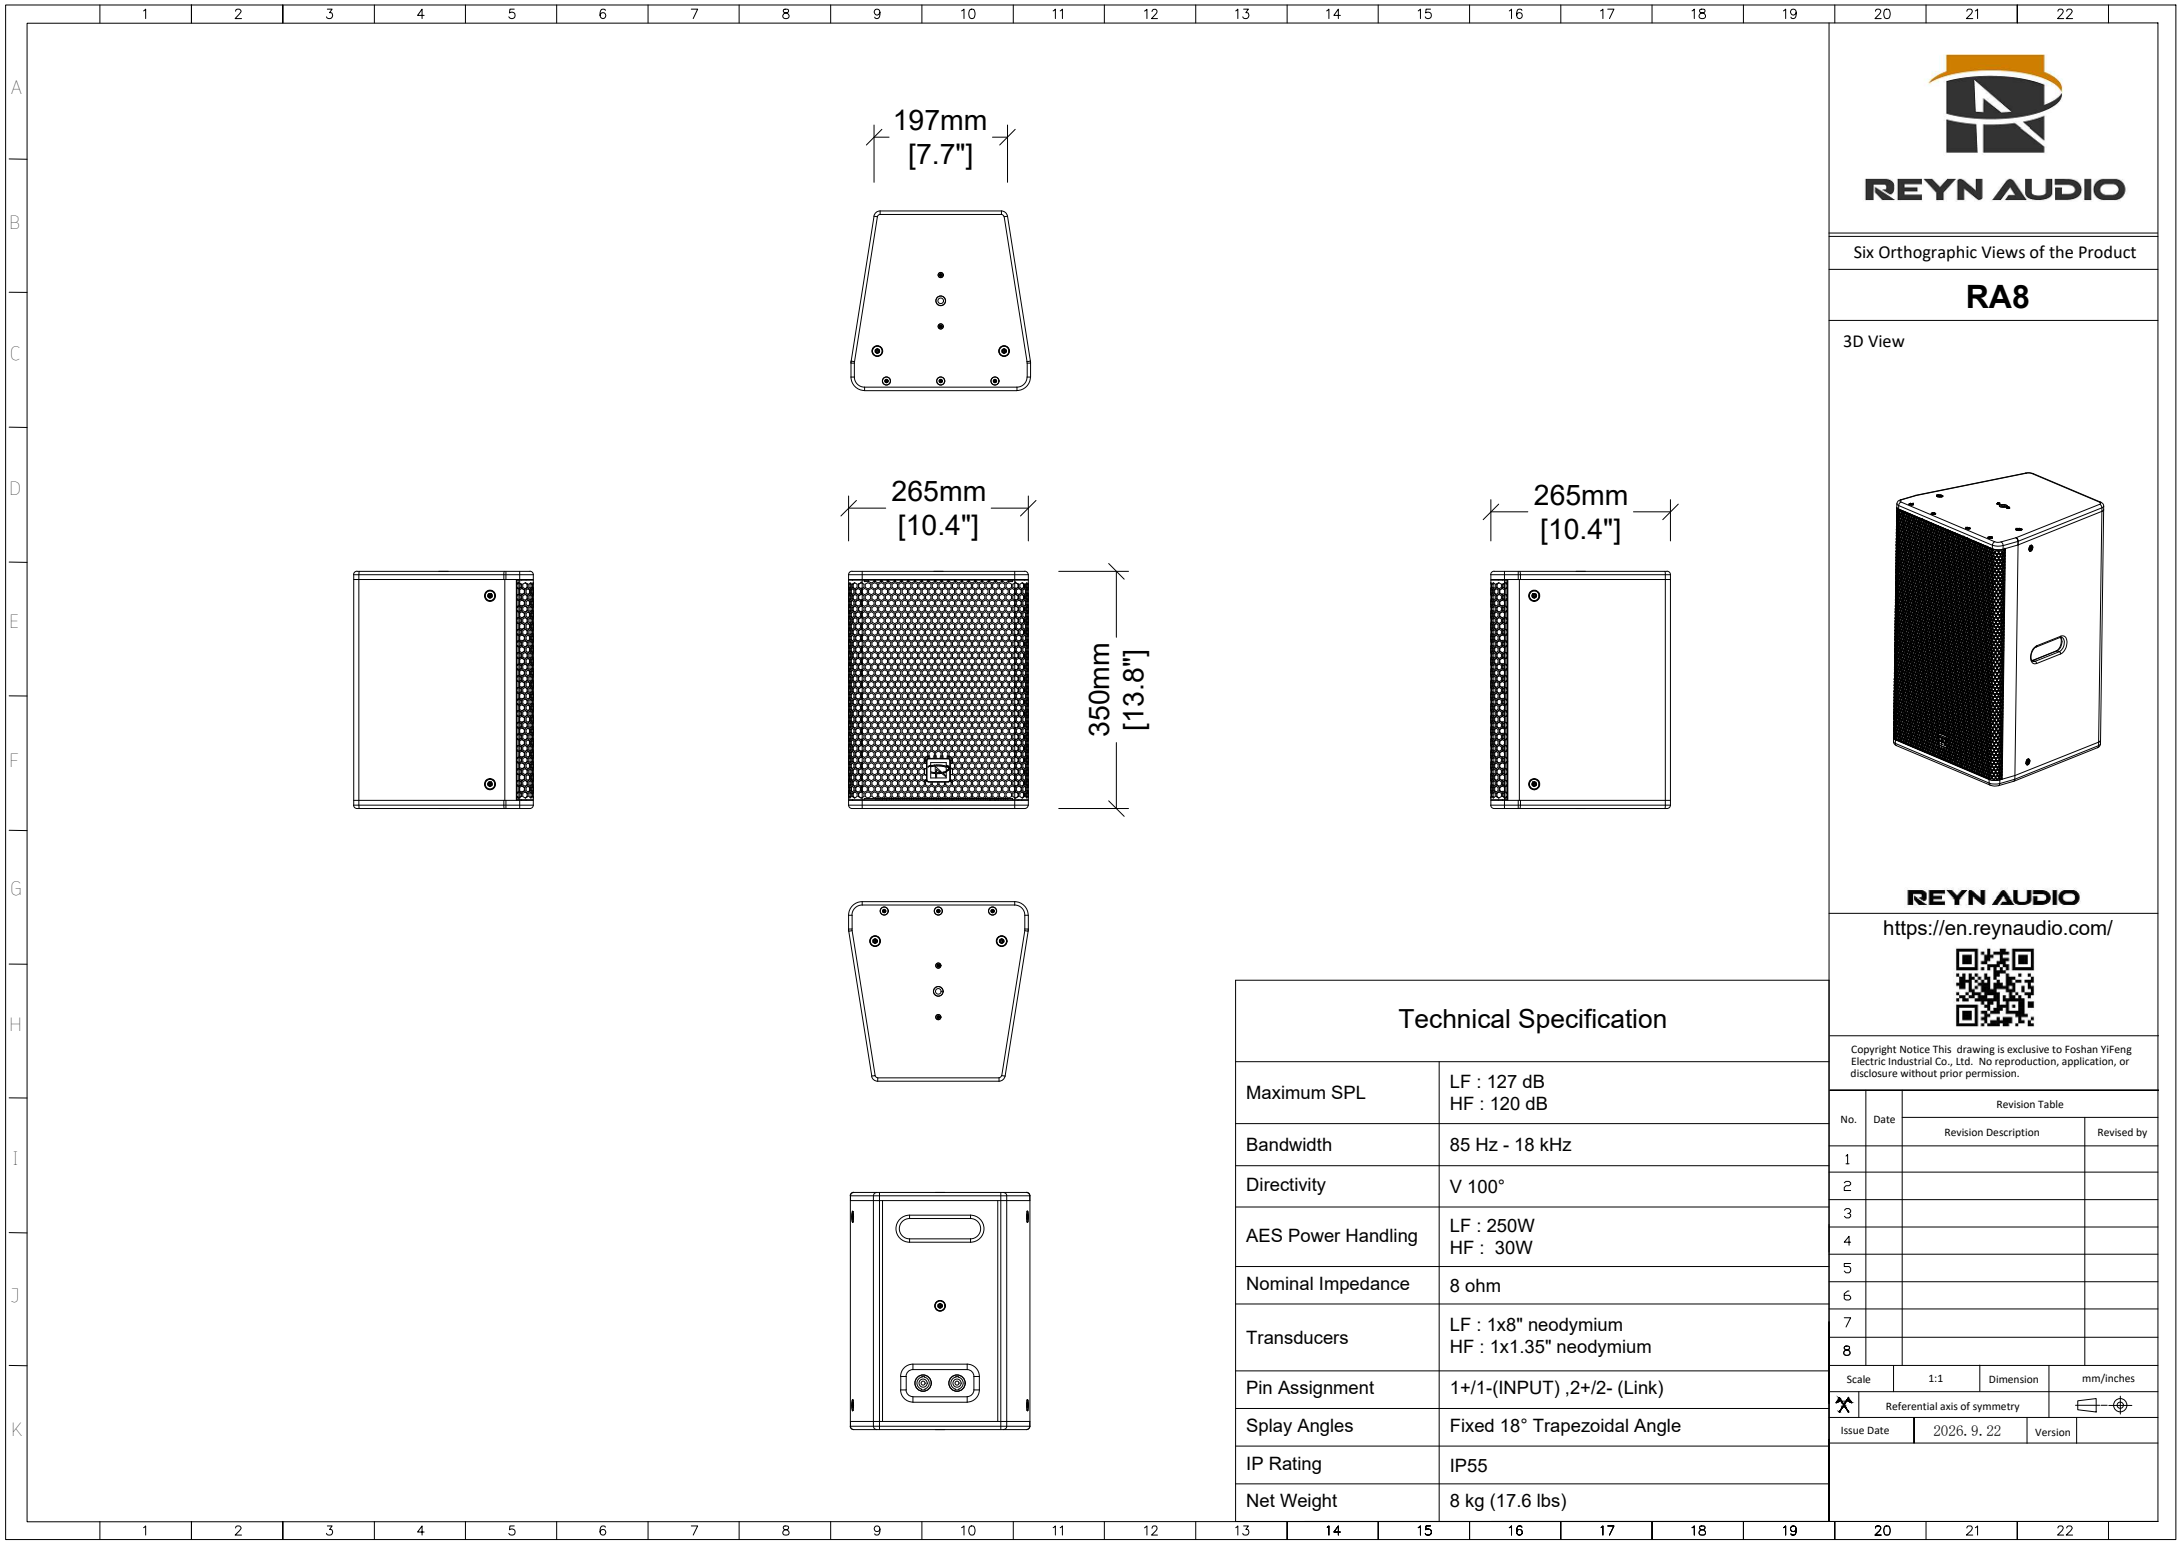

Six Orthographic Views of the Product

RA8


3D View



Copyright Notice This drawing is exclusive to Foshan Yifeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

Technical Specification	
Maximum SPL	LF : 127 dB HF : 120 dB
Bandwidth	85 Hz - 18 kHz
Directivity	V 100°
AES Power Handling	LF : 250W HF : 30W
Nominal Impedance	8 ohm
Transducers	LF : 1x8" neodymium HF : 1x1.35" neodymium
Pin Assignment	1+/1-(INPUT) ,2+/2- (Link)
Splay Angles	Fixed 18° Trapezoidal Angle
IP Rating	IP55
Net Weight	8 kg (17.6 lbs)


Revision Table			
No.	Date	Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			
Scale		1:1	Dimension
Referential axis of symmetry			
Issue Date	2026. 9. 22	Version	

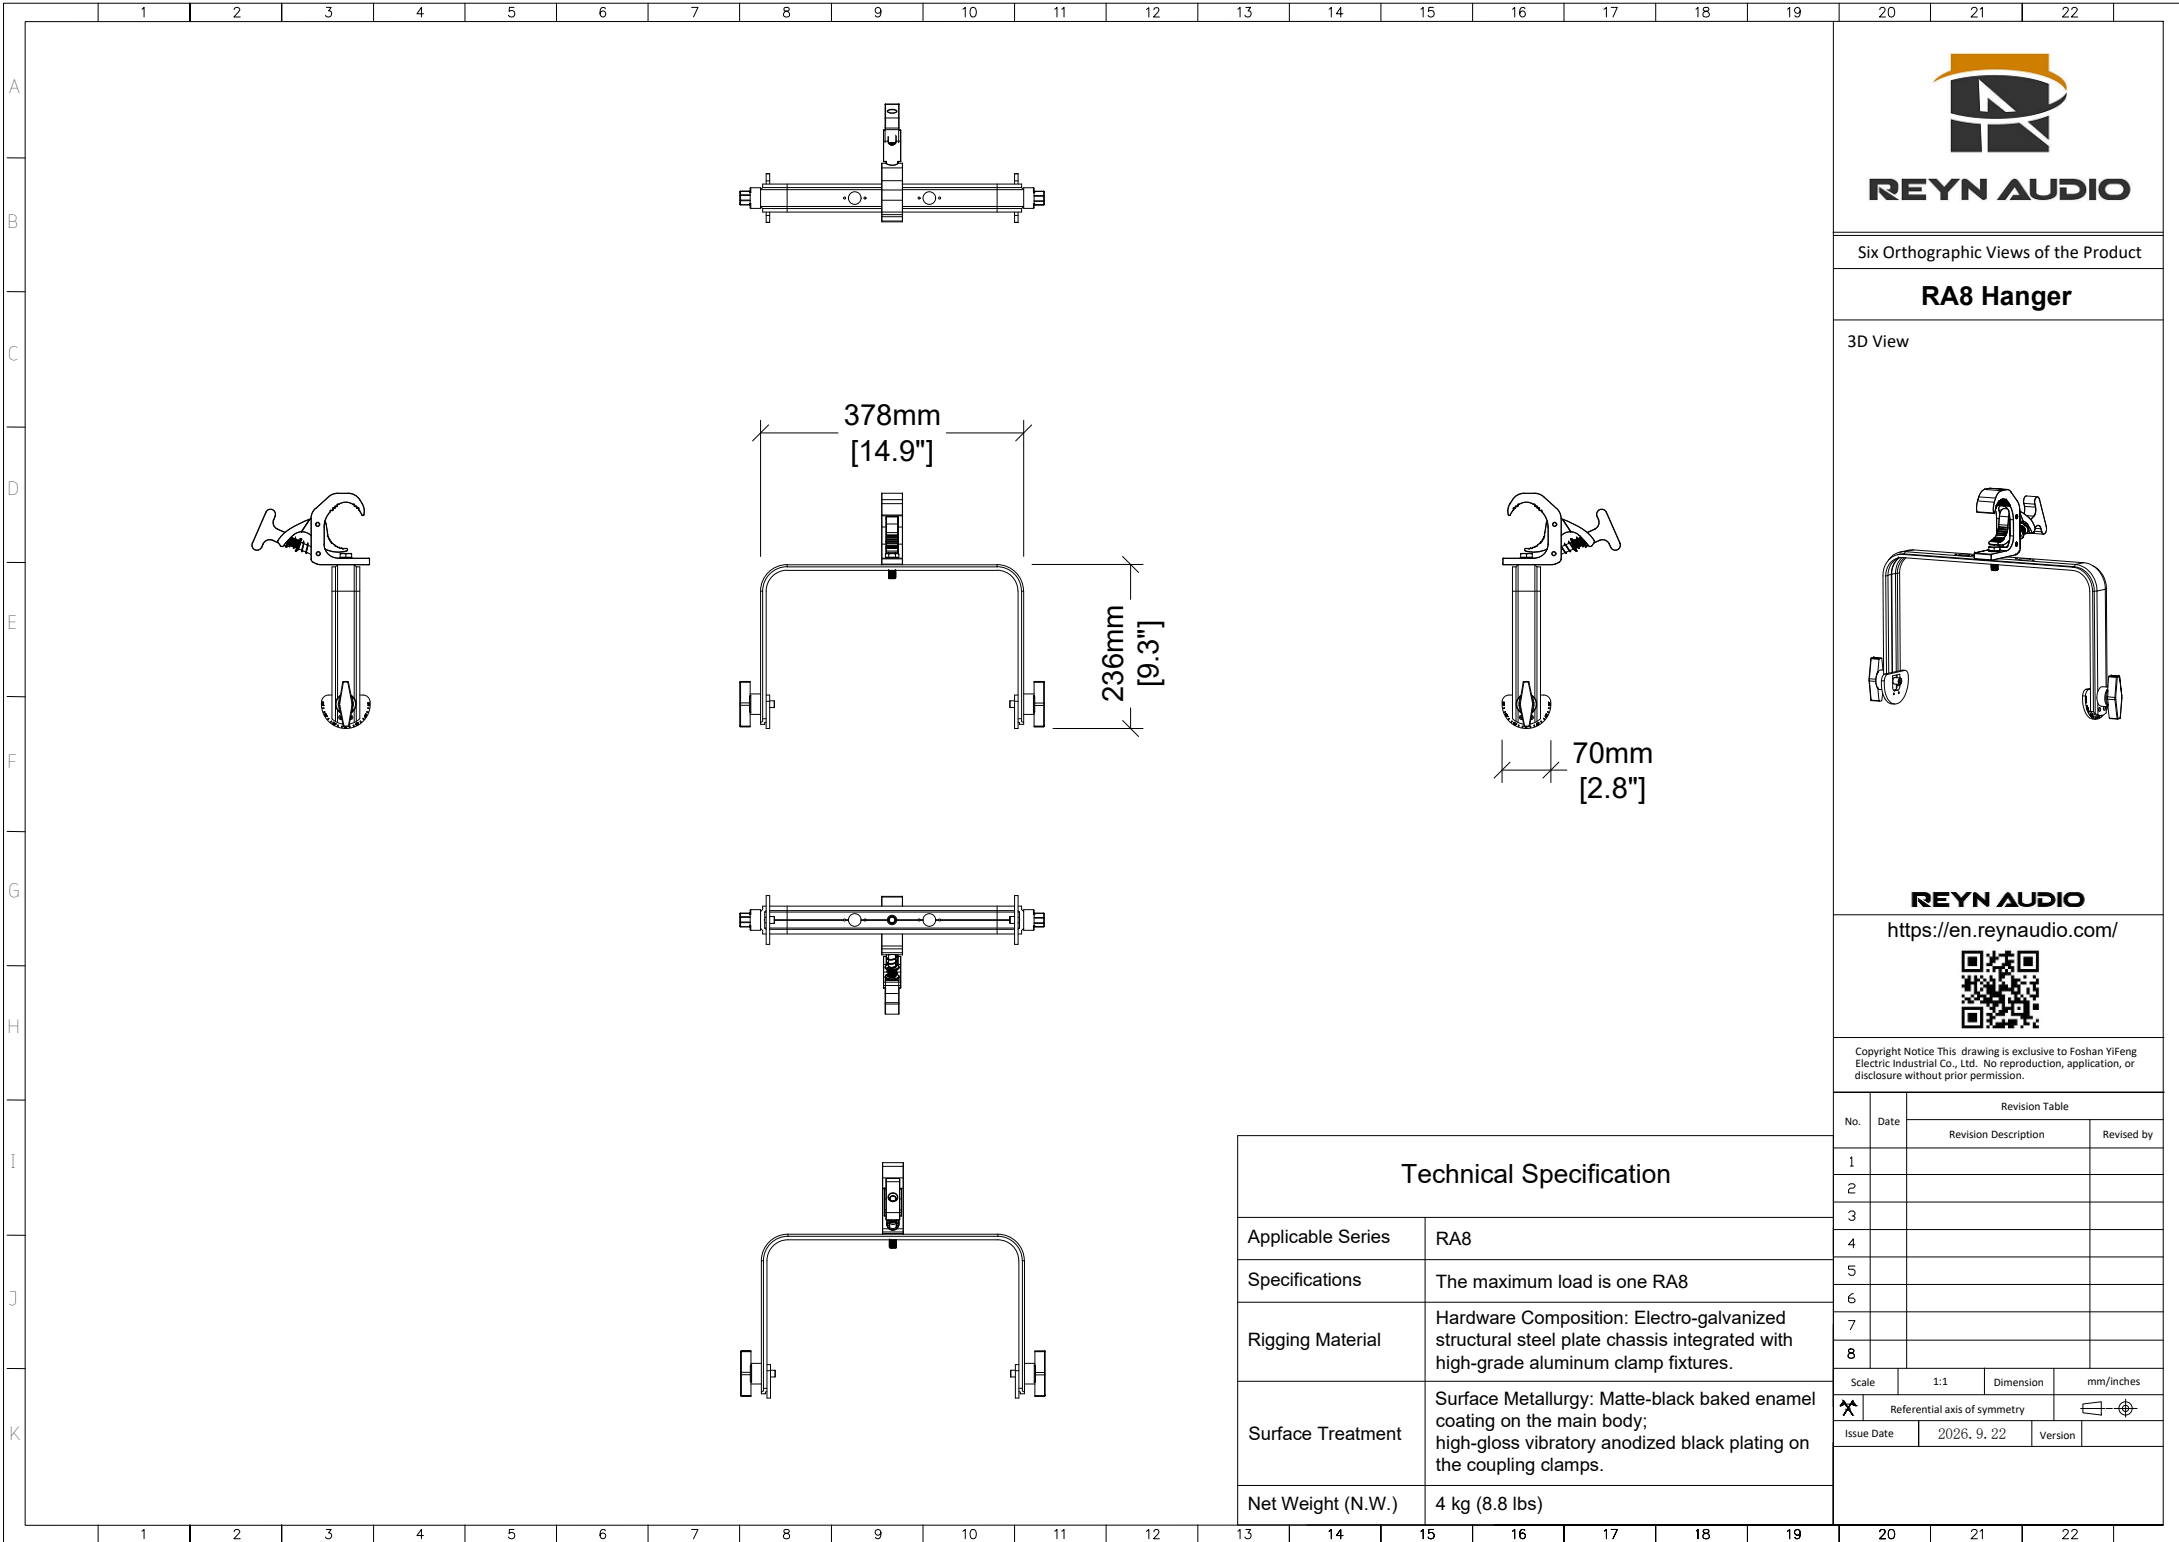

Six Orthographic Views of the Product

RA8 Hanger

3D View



REYN AUDIO

<https://en.reynaudio.com/>



Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

Technical Specification	
Applicable Series	RA8
Specifications	The maximum load is one RA8
Rigging Material	Hardware Composition: Electro-galvanized structural steel plate chassis integrated with high-grade aluminum clamp fixtures.
Surface Treatment	Surface Metallurgy: Matte-black baked enamel coating on the main body; high-gloss vibratory anodized black plating on the coupling clamps.
Net Weight (N.W.)	4 kg (8.8 lbs)

No.	Date	Revision Table	
		Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			
Scale		1:1	Dimension
Referential axis of symmetry			
Issue Date	2026. 9. 22	Version	