

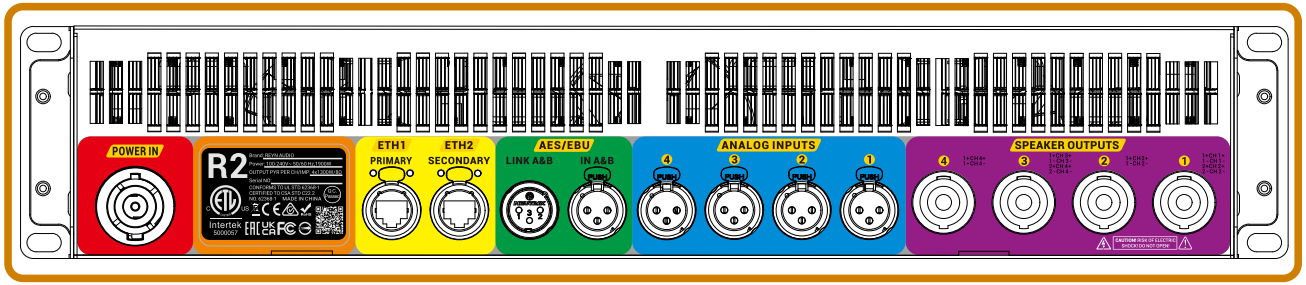



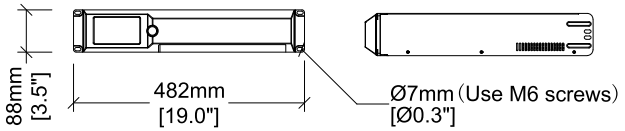

REYN AUDIO

Six Orthographic Views of the Product

R2

3D View



REYN AUDIO

https://en.reynaudio.com/

Technical Specification

Output Channels	4 mono bridgeable per ch. pair	Adjustable Delay	0-1,000ms
Total Peak Power	10,000W	Sampling Rate	96 kHz/24 Bit ADC/24 Bit DAC
Max. Output Voltage	158V	Equalization (EQ)	64-band PEQ
Max. Output Power	1,300W@8Ω；2,100W@4Ω；2,500W@2Ω	Protection Limiters	RMS limiter , Peak limiter
Bandwidth	20Hz-20KHz(<±0.5dB,1W@8Ω)	Mains Voltage	95-265V,50/60Hz switching mode power supply with power factor correction (PFC)
THD+N	Typical value:0.01%(1kHz,8Ω)	Signal Interfaces	6 x 3-pin XLR port inputs , 4 x 3-pin XLR analog inputs ,1 x 3-pin XLR port analogue input , 1 x 3-pin XLR port analogue output
Noise Floor	<-70dB(A weight,20Hz-20kHz,8Ω)	Control Ports	2 x 1,000M Ethernet ports ,communication control signal ,Dante signal
Crosstalk	20kΩ(balanced),10kΩ(non-balanced)	Output Connectivity	4x 4-points Speakon®
Maximum Input Level	+22dBu	Mains Connector	Powercon plug (30A)
Input Signal	Analog、AES/EBU、Dante	Power Switch	Touch screen virtual switch
Protection	overheat voltage limit, overload protection, output DC protection	Front Panel Display	4.3-inch color LCD touch screen Clear display of system status, Plus independent encoder control
Loudspeaker Management	Data setup for all REYNAUDIO brand speakers	Housing Finish	High-strength Al-Mg alloy, baked paint finish; brushed 304 stainless steel housing
Control & Monitoring Software	Turandot	Operating Temperature	0°-40
DSP (Digital Signal Processor)	Analog Devices audio dedicated DSP (ADSP-21569)	Net Weight	18 kg (39.7 lbs)
System Latency (Analog Input)	2.52ms		

Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

No.	Date	Revision Table: Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			

Scale	1:1	Dimension	mm/inches
Referential axis of symmetry			
Issue Date	2026. 9. 28	Version	