




3D View






REYN AUDIO

<https://en.reynaudio.com/>



Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

No.	Date	Revision Table			
		Revision Description			Revised By
1					
2					
3					
4					
5					
6					
7					
8					
Scale		1:1		Dimension	mm/inches
 Referential axis of symmetry Issue Date 2026.10.16 Version  					

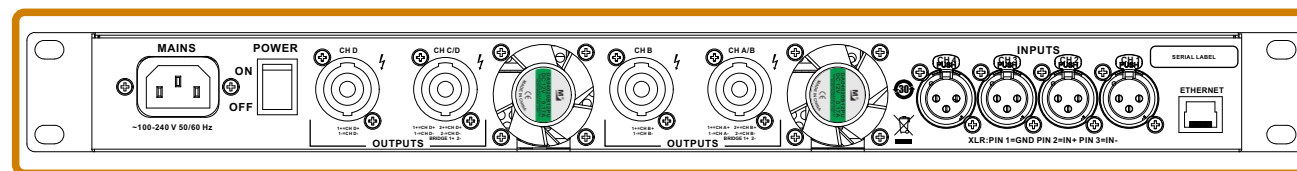

Technical Specification

Output Channels	4 mono bridgeable per ch. pair	System Latency (Analog Input)	1.52ms
Total Peak Power	3,600W	Adjustable Delay	0-160ms
Max. Output Voltage	80V	Sampling Rate	96 kHz/24 Bit ADC/24 Bit DAC
Max. Output Power	4x800W RMS @8Ω (Stereo mode); 4x1,200W RMS @4Ω (Stereo mode) 2x1,800W RMS @8Ω (Bridge mode)	Equalization (EQ)	7-band PEQ
Bandwidth	20Hz-20KHz(<±0.5dB, 1W@8Ω)	Protection Limiters	Peak limiter
THD+N	Typical value:0.05% (10% nominal output power, 1 kHz,8Ω)	Mains Voltage	100-240V(±10%) , 50/60Hz switching mode power supply with power factor correction (PFC)
Noise Floor	<-65 dB (A weight,20 Hz - 20 kHz,8Ω)	Signal Interfaces	4 x 3-pin XLR analog inputs
Crosstalk rejection	>75 dB (Sub-rated power threshold,20 Hz - 1 kHz,8Ω)	Control Ports	1 x 100Mbps Ethernet port RJ45 ,communication control signals
Crosstalk	20kΩ(balanced),10kΩ(non-balanced)	Output Connectivity	2x 4-points Speakon®
Maximum Input Level	+22dBu	Mains Connector	IEC plug
Input Signal	Analog	Power Switch	Physical power switch
Protection	overheat voltage limit, overload protection, output DC protection	Front Panel Display	1.8-inch TFT LCD color display for real-time telemetry, backed by physical navigation buttons
Loudspeaker Management	Integrated factory DSP preset library for REYNAUDIO K Series , RA Series ,and B Series loudspeakers.	Housing Material & Finish	High-grade aluminum-magnesium alloy with powder-coated finish
Control & Monitoring Software	REYNAUDIO AMP Controller	Operating Temperature	0°-40
DSP (Digital Signal Processor)	Analog Devices audio dedicated DSP	Net Weight	5.4 kg (11.9 lbs)