
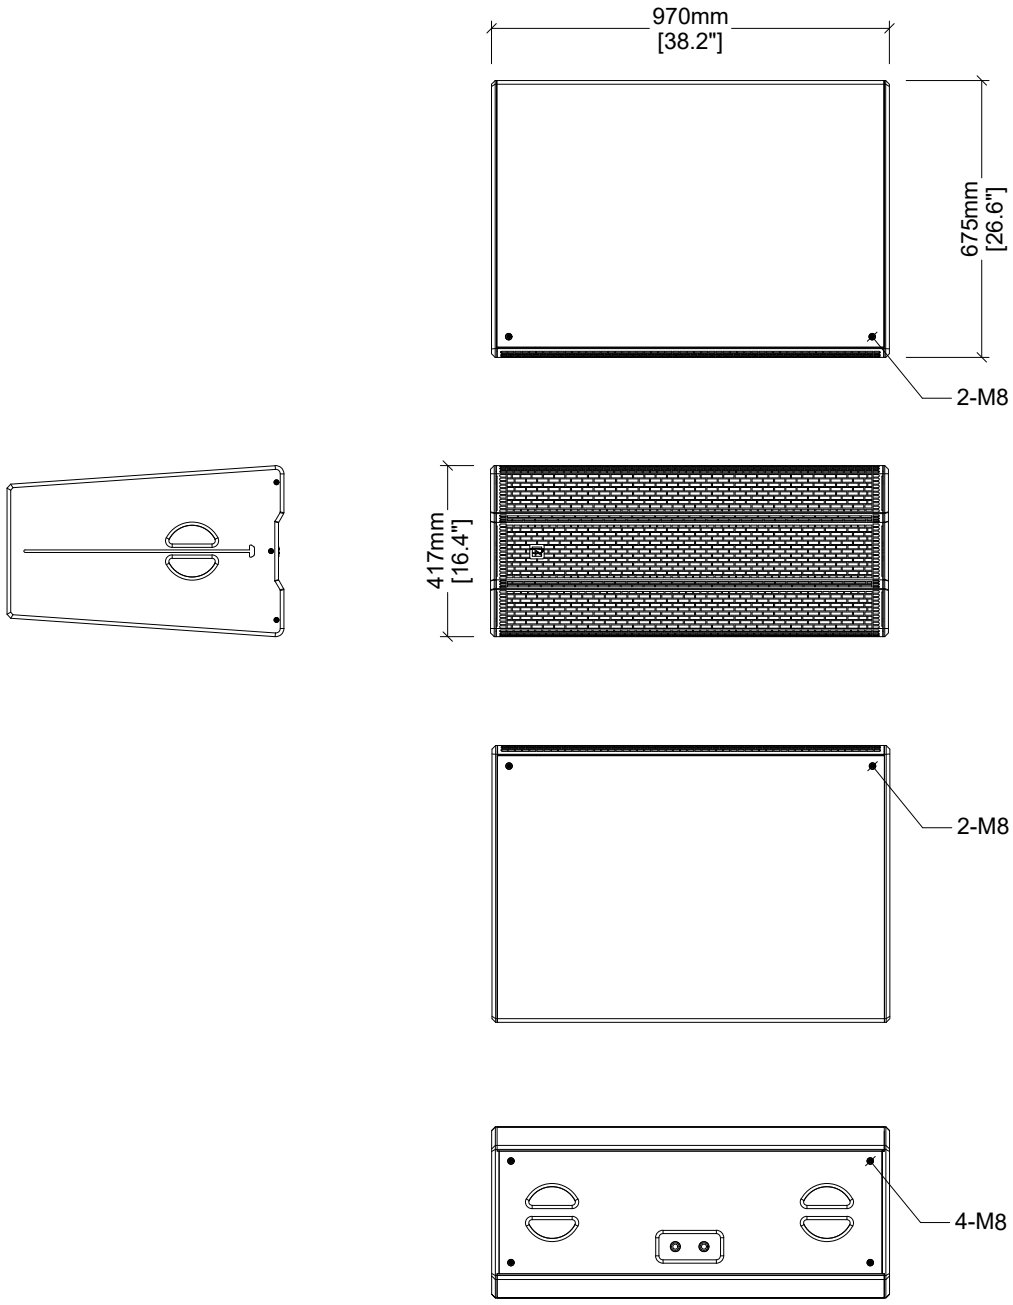


REYN AUDIO

Six Orthographic Views of the Product

RX14

3D View



REYN AUDIO

https://en.reynaudio.com/


Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.


Technical Specification


Maximum SPL	LF : 140 dB MF : 142 dB HF : 141 dB
Bandwidth	45 Hz - 18 kHz
Directivity	H 80°
AES Power Handling	LF : 1400W MF : 110W HF : 80W
Nominal Impedance	LF : 4 ohm MF : 8 ohm HF : 8 ohm
Transducers	LF : 2x14" neodymium MF : 1x4" neodymium HF : 1x2.5" neodymium
Pin Assignment	1+/1-(INPUT) ,2+/2- (Link)
Splay Angles	Fixed 8° Trapezoidal Angle
IP Rating	IP55
Net Weight	53 kg (116.8 lbs)


No.	Date	Revision Table	
		Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			


Scale	1:1	Dimension	mm/inches
Referential axis of symmetry			
Issue Date	2026. 9. 12	Version	

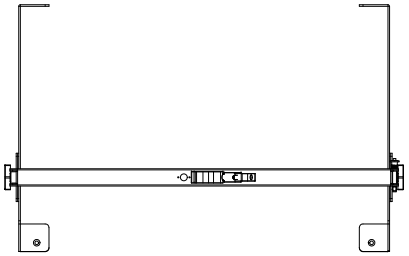




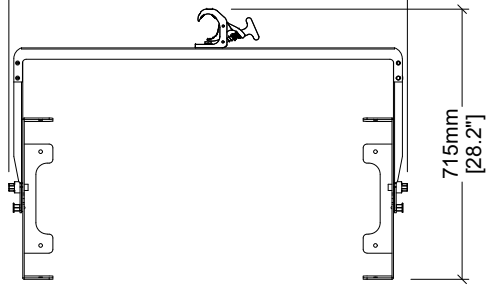



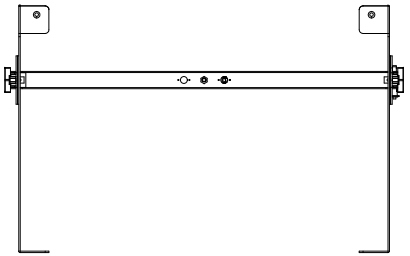

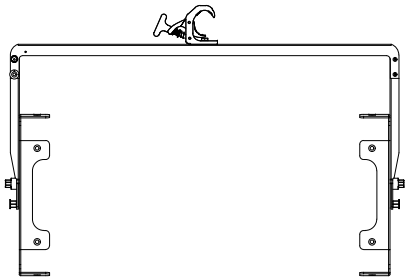


Technical Specification	
Applicable Series	RX14
Specifications	The maximum load is one RX14
Rigging Material	Hardware Composition: Structural cold-rolled steel plate chassis integrated with high-grade aluminum clamp fixtures.
Surface Treatment	Surface Metallurgy: Matte-black baked enamel coating on the main body; high-gloss vibratory anodized black plating on the coupling clamps.
Net Weight (N.W.)	13 kg (28.7 lbs)

REYN AUDIO

Six Orthographic Views of the Product

RX14 Bumper

3D View



REYN AUDIO

https://en.reynaudio.com/

Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

No.	Date	Revision Table: Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			

Scale	1:1	Dimension	mm/inches
Referential axis of symmetry			
Issue Date	2026. 9. 12	Version	