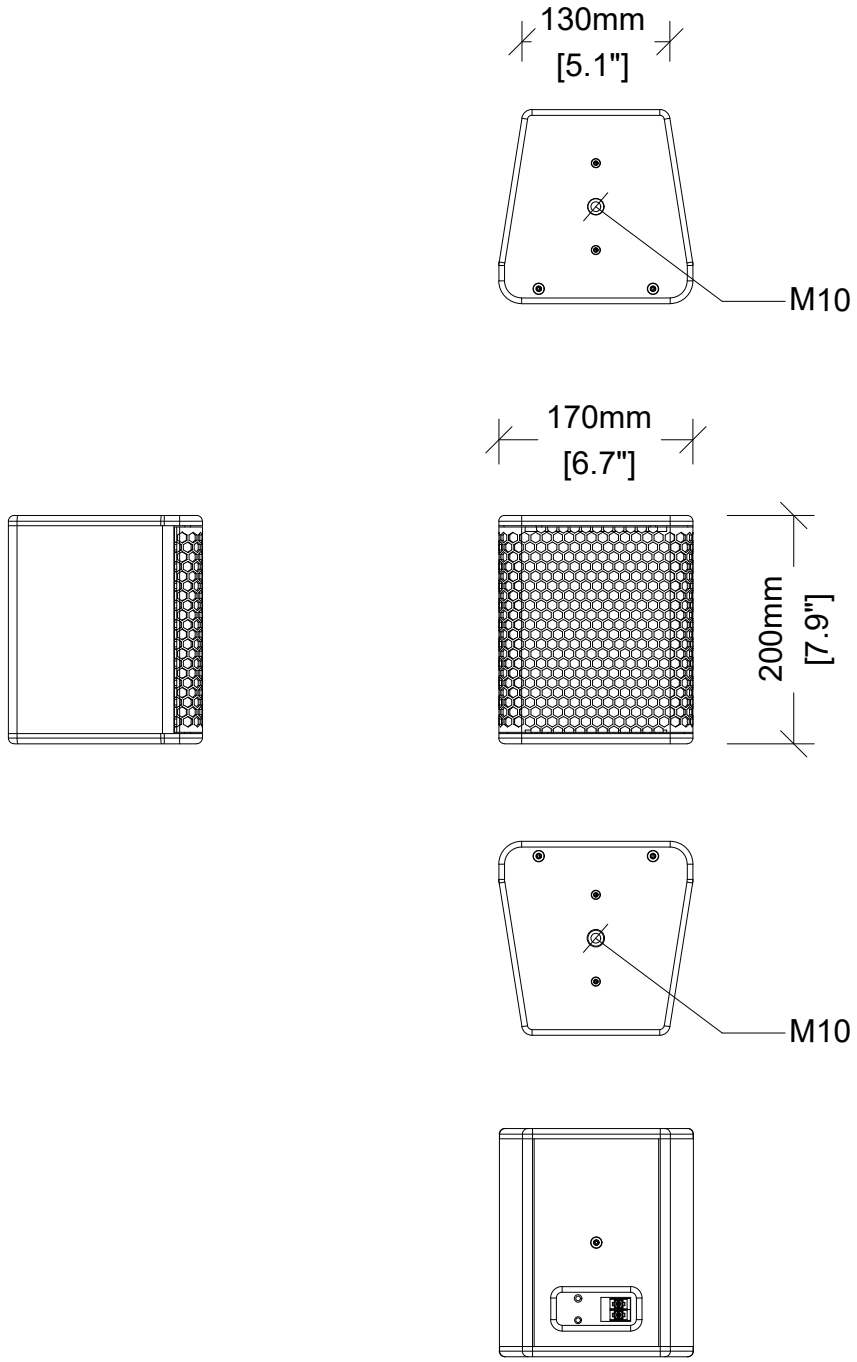


Technical Specification


Maximum SPL	LF : 112 dB HF : 121 dB
Bandwidth	100 Hz - 18 kHz
Directivity	V 80°
AES Power Handling	LF : 150W HF : 30W
Nominal Impedance	16 ohm
Transducers	LF : 1x5" neodymium HF : 1x1.75" neodymium
Pin Assignment	1+/1-(INPUT) ,2+/2- (Link)
Splay Angles	Fixed 18° Trapezoidal Angle
IP Rating	IP55
Net Weight	3 kg (6.6 lbs)

REYN AUDIO

Six Orthographic Views of the Product

RA5

3D View




REYN AUDIO


https://en.reynaudio.com/


Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.


No.	Date	Revision Table Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			


Scale	1:1	Dimension	mm/inches
Referential axis of symmetry			
Issue Date	2026. 9. 22	Version	






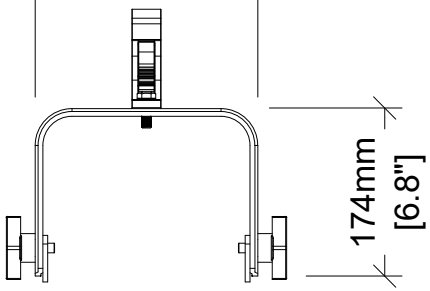

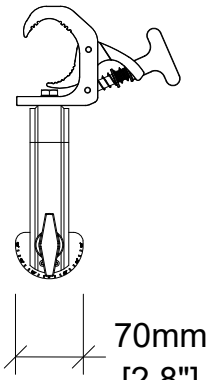






Technical Specification	
Applicable Series	RA5
Specifications	The maximum load is one RA5
Rigging Material	Birch-faced combi-core plywood.
Surface Treatment	Black, fine-textured two-component polyurea finish.
Net Weight (N.W.)	3 kg (6.6 lbs)

REYN AUDIO

Six Orthographic Views of the Product

RA5 Hanger

3D View



REYN AUDIO

https://en.reynaudio.com/

Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

No.	Date	Revision Table	
		Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			

Scale	1:1	Dimension	mm/inches
Referential axis of symmetry			
Issue Date	2026. 9. 22	Version	