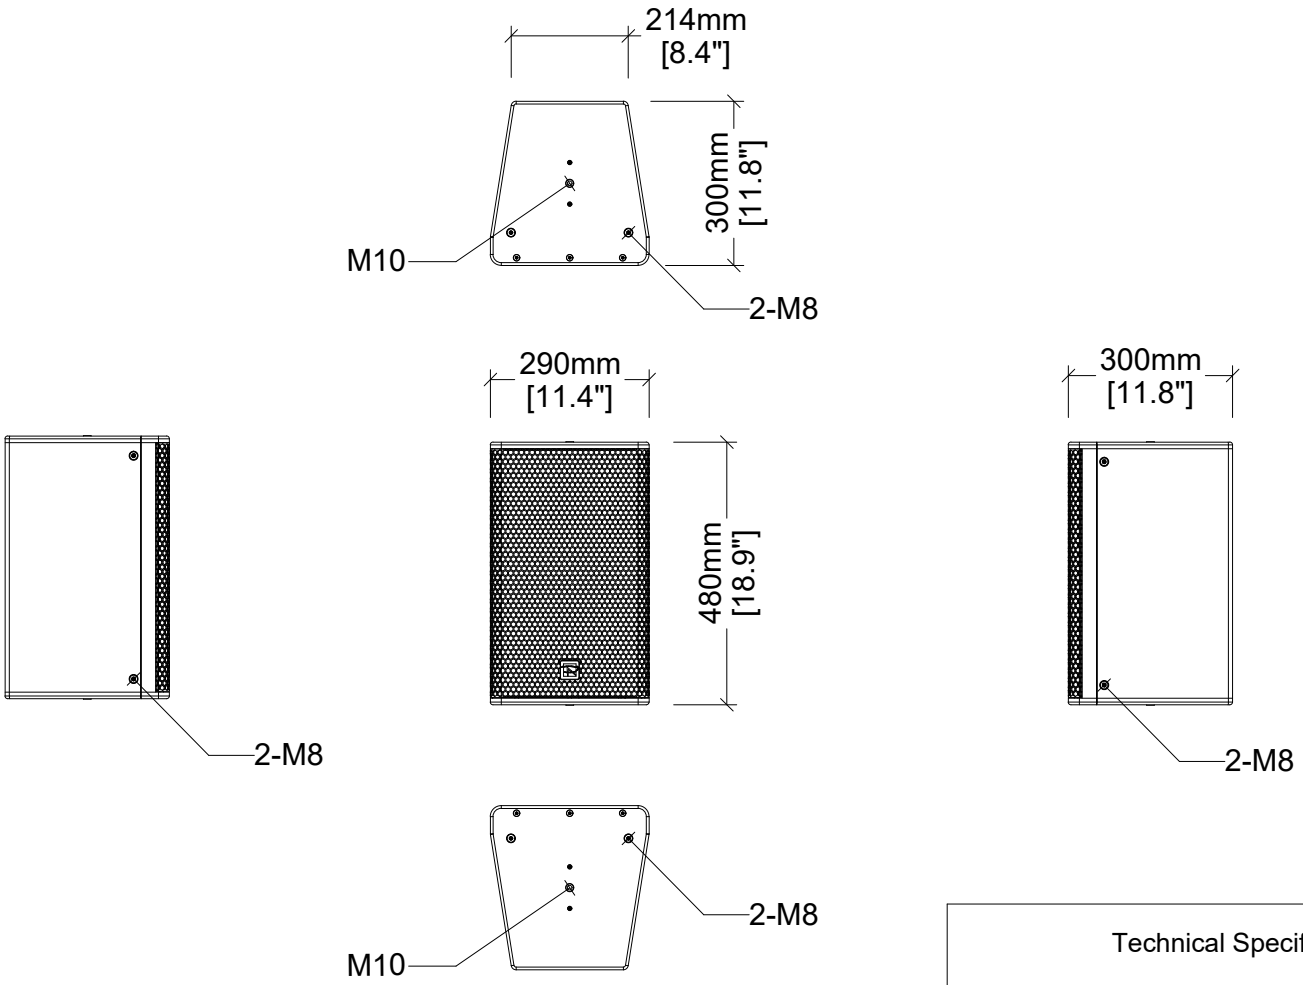


Technical Specification


Maximum SPL	LF : 128 dB HF : 125 dB
Bandwidth	63 Hz - 18 kHz
Directivity	V 70°
AES Power Handling	LF : 300W HF : 45W
Nominal Impedance	8 ohm
Transducers	LF : 1x10" neodymium HF : 1x1.75" neodymium
Pin Assignment	1+/1-(INPUT) ,2+/2- (Link)
Splay Angles	Fixed 18° Trapezoidal Angle
IP Rating	IP55
Net Weight	11 kg (24.3 lbs)

REYN AUDIO

Six Orthographic Views of the Product

RA10

3D View




REYN AUDIO


https://en.reynaudio.com/


Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.


No.	Date	Revision Table Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			


Scale	1:1	Dimension	mm/inches
Referential axis of symmetry			
Issue Date	2026. 9. 21	Version	






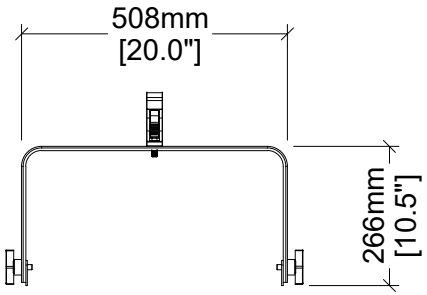








Technical Specification	
Applicable Series	RA15
Specifications	The maximum load is one RA10
Rigging Material	Hardware Composition: Electro-galvanized structural steel plate chassis integrated with high-grade aluminum clamp fixtures.
Surface Treatment	Surface Metallurgy: Matte-black baked enamel coating on the main body; high-gloss vibratory anodized black plating on the coupling clamps.
Net Weight (N.W.)	2 kg (4.4 lbs)

REYN AUDIO

Six Orthographic Views of the Product

RA10 Hanger

3D View



REYN AUDIO

https://en.reynaudio.com/

Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

No.	Date	Revision Table: Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			

Scale	1:1	Dimension	mm/inches
Referential axis of symmetry			
Issue Date	2026. 9. 21	Version	