

Technical Specification


Audio input	Analog、AES/EBU、Dante
Audio output	2 x 24-pin sockets, 4 x 8-pin sockets
Mains Input	5-pin 32A IP44 male connector
Integrated Amplifier Model	R1 & R2
Max. Amplifier Count	6 units amplifier, 2 units S1 2 units SW8, 1 unit A1
Material	Polyethylene, cold-rolled steel external structure, Full birch AB fine-grained polymer doors
ETH (Dante®)	4 x ruggedized and lockable RJ45 connectors (2 x Primary, 2 x Secondary), CAT5e standard
AC Mains Input	32 A - IEC 60,309 (3P+N+GND) Integrated 1.5 m cable with waterproof male plug
Mains Link	Single-phase universal socket with spring-loaded flip cover
AC Output for R1/R2 Amplifiers	6 x power cables, equipped with 32 A Neutrik powerCON®connectors (AMP 1&4 L1, AMP 2&5 L2, AMP 3&6 L3)
RA1 Protection	10 A Type C circuit breaker (AUX L3)
Analog Input / Output	8 x Neutrik® XLR3 female (IN) / 4 x Neutrik® XLR3 male (LINK)
AES/EBU Input	6 x Neutrik® XLR3 female (IN) / 6 x Neutrik® XLR3 male (LINK)
Net Weight	229 kg (504.9 lbs)

REYN AUDIO

Six Orthographic Views of the Product

RA1

3D View

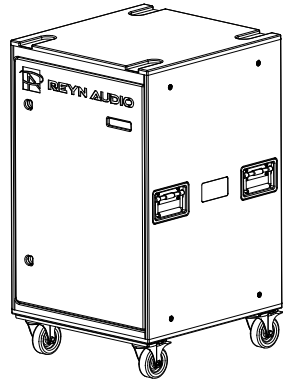

REYN AUDIO

https://en.reynaudio.com/

Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

No.	Date	Revision Table Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			

Scale	1:1	Dimension	mm/inches
Referential axis of symmetry			
Issue Date	2026. 9. 28	Version	