

Technical Specification


Maximum SPL	LF : 131 dB HF : 133 dB
Bandwidth	45 Hz - 18 kHz
Directivity	V 60°
AES Power Handling	LF : 500W HF : 70W
Nominal Impedance	6 ohm
Transducers	LF : 1x15" neodymium HF : 1x2" neodymium
Pin Assignment	1+/1-(INPUT) ,2+/2- (Link)
Splay Angles	Fixed angle
IP Rating	IP55
Net Weight	27 kg (59.5 lbs)

REYN AUDIO

Six Orthographic Views of the Product

RA15

3D View




REYN AUDIO


https://en.reynaudio.com/


Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.


No.	Date	Revision Table Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			


Scale	1:1	Dimension	mm/inches
Referential axis of symmetry			
Issue Date	2026. 9. 18	Version	






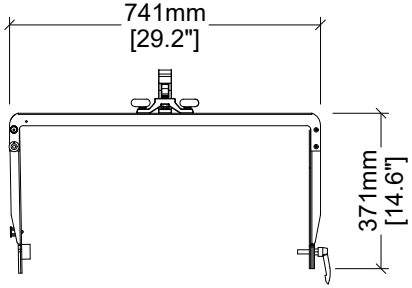








Technical Specification	
Applicable Series	RA15
Specifications	The maximum load is one RX14
Rigging Material	Hardware Composition: Structural cold-rolled steel plate chassis integrated with high-grade aluminum clamp fixtures.
Surface Treatment	Surface Metallurgy: Matte-black baked enamel coating on the main body; high-gloss vibratory anodized black plating on the coupling clamps.
Net Weight (N.W.)	5 kg (11 lbs)

REYN AUDIO

Six Orthographic Views of the Product

RA15 Bumper

3D View



REYN AUDIO

https://en.reynaudio.com/

Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

No.	Date	Revision Table Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			

Scale	1:1	Dimension	mm/inches
Referential axis of symmetry			
Issue Date	2026. 9. 18	Version	