

Technical Specification


Audio input	Analog、AES/EBU、Dante
Audio output	1 x 24-pin sockets，2 x 8-pin sockets 2 x 4-pin NL4 sockets
Mains Input	5-pin 32A IP44 male/female connector
Integrated Amplifier Model	R1 & R2
Max. Amplifier Count	3 units amplifier 1 unit S1, 2 units SW8, 1 unit A2
Material	Polyethylene, cold-rolled steel external structure, Full birch AB fine-grained polymer doors
ETH (Dante®)	4 x ruggedized and lockable RJ45 connectors (2 x Primary, 2 x Secondary), CAT5e standard
AC Mains Input	32 A - IEC 60,309 (3P+N+GND) Integrated 1.5 m cable with waterproof male plug
Mains Link	Main output: 32 A - IEC 60,309 (3P+N+GND) Waterproof female socket AUX Output: Single-phase universal flip-top power socket
Rigging Structures	It can be used with the RA2 Bumper
AC Output for R1/R2 Amplifiers	3 x power cables, equipped with 32 A Neutrik powerCON®connectors (AMP 1&4 L1, AMP 2&5 L2, AMP 3&6 L3)
RA1 Protection	10 A Type C circuit breaker (AUX L3)
Analog Input / Output	4 x Neutrik® XLR3 female (IN) / 2 x Neutrik® XLR3 male (LINK)
AES/EBU Input	3 x Neutrik® XLR3 female (IN) / 3 x Neutrik® XLR3 male (LINK)
Net Weight	160 kg (352.7 lbs)

REYN AUDIO

Six Orthographic Views of the Product

RA2

3D View




REYN AUDIO


https://en.reynaudio.com/

Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.


No.	Date	Revision Table Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			


Scale	1:1	Dimension	mm/inches
Referential axis of symmetry			
Issue Date	2026. 9. 28	Version	

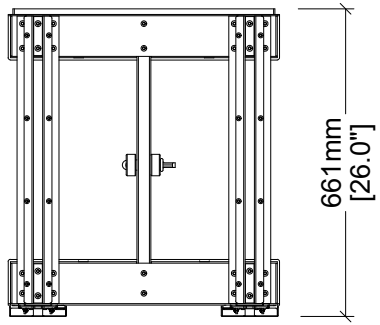












Technical Specification


Applicable Series	RA2
Specifications	Maximum capacity 1 pieces RA2
WLL (Working Load Limit)	160 kg (352.7 lbs)
Safety Factor	10.7 times
TÜV SÜD Test Report No.	64.190.25.3242.01-00
Rigging Material	Main Structural constructed from SPCC Logo plate: Birch-faced combi-core plywood.
Surface Treatment	Main Structural constructed from black matte-textured powder coating with 10-year outdoor rating Logo plate: Black, fine-textured two-component polyurea finish.
Net Weight (N.W.)	19 kg (41.8 lbs)

REYN AUDIO

Six Orthographic Views of the Product

RA2 Bumper

3D View



REYN AUDIO

https://en.reynaudio.com/

Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

No.	Date	Revision Table: Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			

Scale	1:1	Dimension	mm/inches
Referential axis of symmetry			
Issue Date	2026. 9. 22	Version	