
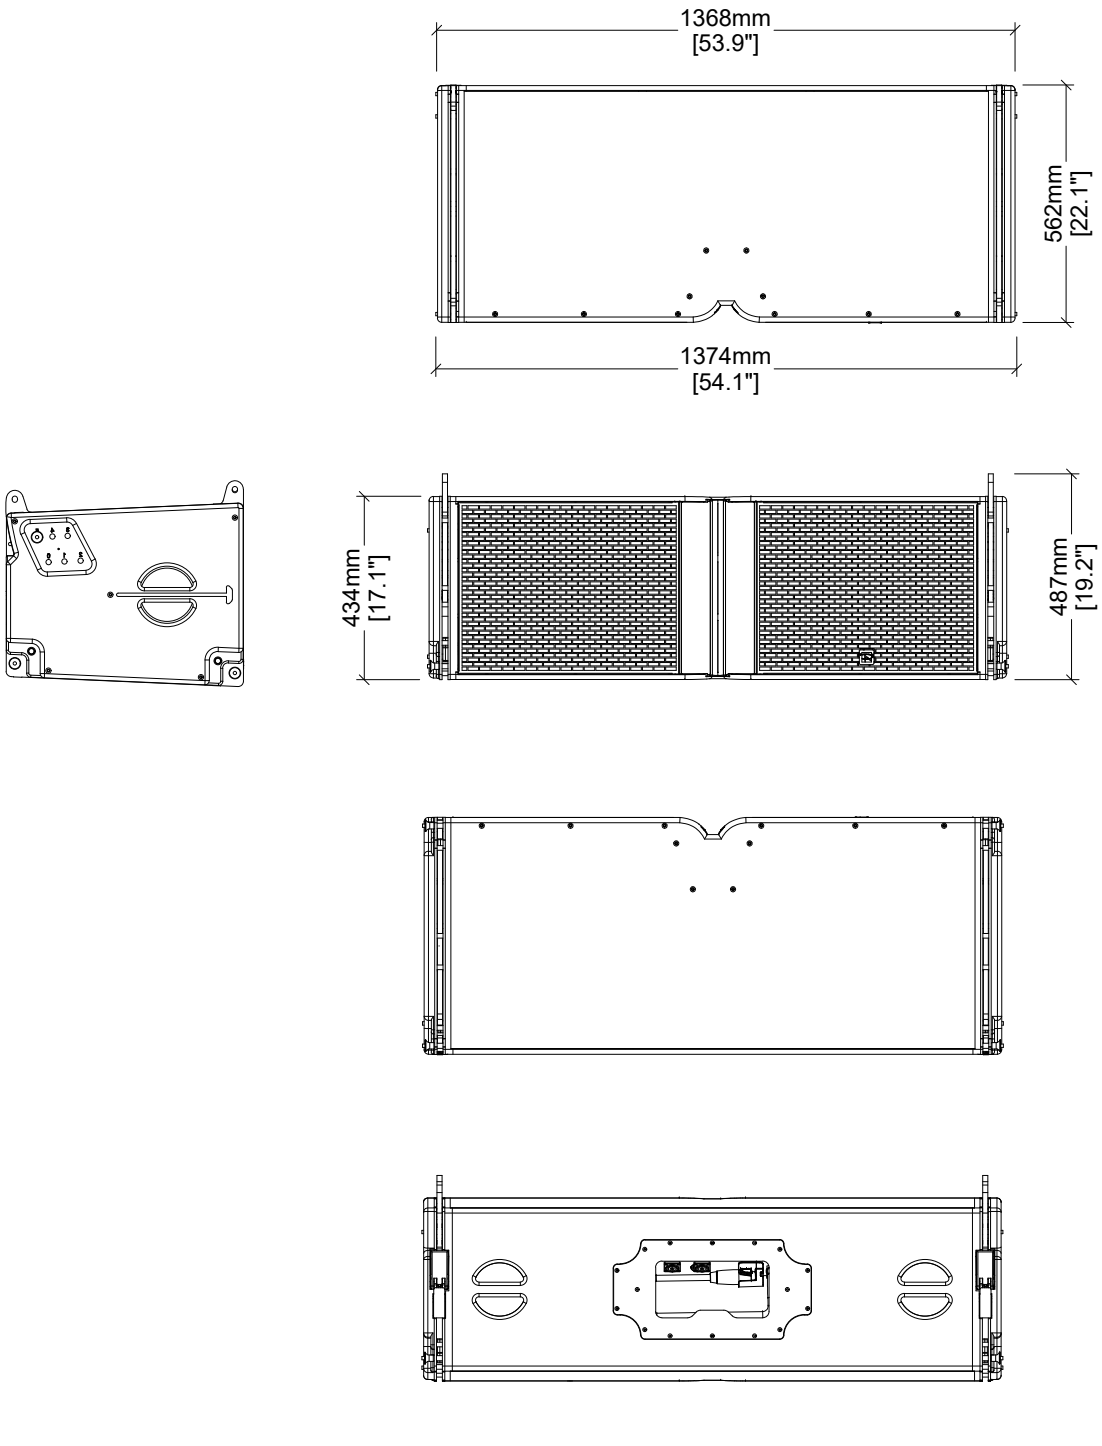



REYN AUDIO

Six Orthographic Views of the Product

# RL15

3D View



REYN AUDIO

https://en.reynaudio.com/


## Technical Specification


| | |
|---|---|
| Maximum SPL | 149 dB |
| Bandwidth | 35 Hz - 20 kHz |
| Directivity | H 70° 90° 110° Adjustable<br>V 5° |
| AES Power Handling | LF : 1400W<br>HMF : 400W |
| Nominal Impedance | LF : 4 ohm<br>HMF : 8 ohm |
| Transducers | LF : 2×15" neodymium<br>MF : 1×10" neodymium<br>HF : 3×3" neodymium |
| Pin Assignment | 1+/1- (LF) ,2+/2- (MHF) |
| Splay Angles | 0° 1° 2° 3° 4° 5° |
| IP Rating | IP55 |
| Net Weight | 98 kg (216.1 lbs) |


Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.


| No. | Date | Revision Table<br>Revision Description | Revised by |
|---|---|---|---|
| 1 | | | |
| 2 | | | |
| 3 | | | |
| 4 | | | |
| 5 | | | |
| 6 | | | |
| 7 | | | |
| 8 | | | |


| | | | |
|---|---|---|---|
| Scale | 1:1 | Dimension | mm/inches |
| Referential axis of symmetry | | | |
| Issue Date | 2026. 6. 30 | Version | |

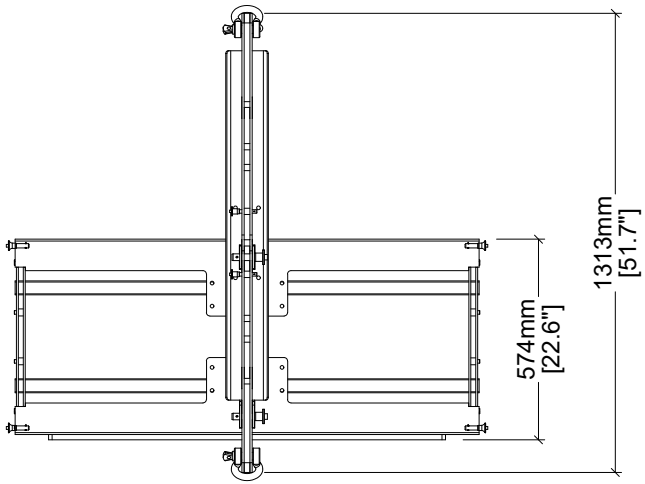


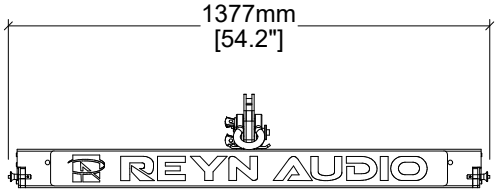
## Technical Specification

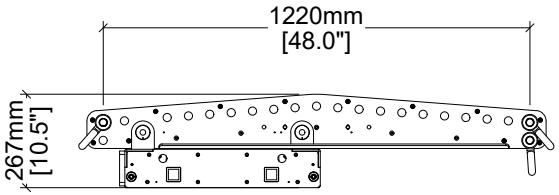
| | |
|---|---|
| Specifications | Max capacity: 24 pcs RL15 |
| WLL (Working Load Limit) | 2,350 kg (5.180.9 lbs) |
| Safety Factor | 5.8 times |
| TÜV SÜD Test Report No. | 64.190.24.0765.01-00 |
| Rigging Material | Main Structural and crossbar constructed from 304 stainless steel;<br>Logo plate: Birch-faced combi-core plywood. |
| Surface Treatment | Main Structural and crossbar constructed from black matte-textured powder coating with 10-year outdoor rating;<br>Logo plate: Black, fine-textured two-component polyurea finish. |
| Net Weight (N.W.) | 105 kg (231.5 lbs) |

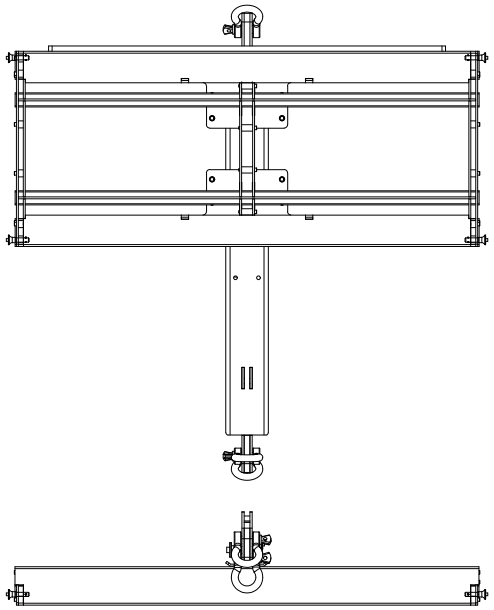REYN AUDIO

Six Orthographic Views of the Product

# RL15 Bumper

3D View





REYN AUDIO


https://en.reynaudio.com/


Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.


| No. | Date | Revision Table | |
|---|---|---|---|
| | | Revision Description | Revised by |
| 1 | | | |
| 2 | | | |
| 3 | | | |
| 4 | | | |
| 5 | | | |
| 6 | | | |
| 7 | | | |
| 8 | | | |


| | | | |
|---|---|---|---|
| Scale | 1:1 | Dimension | mm/inches |
| Referential axis of symmetry | | | |
| Issue Date | 2026. 7. 29 | Version | |

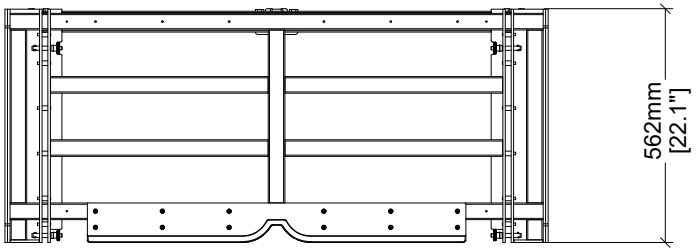


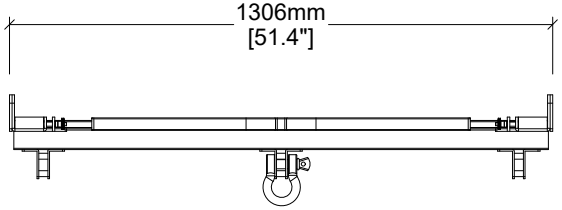



## Technical Specification

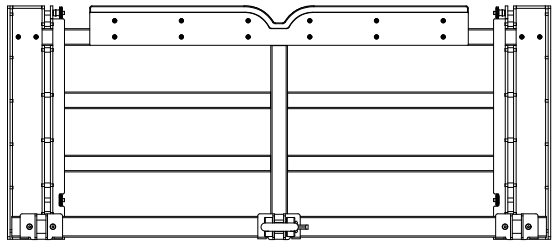
| | |
|---|---|
| Applicable Series | RL15 、RL2 |
| Specifications | Max capacity: 12 pcs RL2 |
| WLL (Working Load Limit) | 840 kg (1,851.9lbs) |
| Safety Factor | 6.5 times |
| TÜV SÜD Test Report No. | 64.190.24.5068.01-00 |
| Rigging Material | Main Structural and crossbar constructed from 304 stainless steel.<br>Logo plate: Birch-faced combi-core plywood. |
| Surface Treatment | Main Structural constructed from black matte-textured powder coating with 10-year outdoor rating.<br>Logo plate: Black, fine-textured two-component polyurea finish. |
| Net Weight (N.W.) | 24 kg (52.9 lbs) |

REYN AUDIO

Six Orthographic Views of the Product

# RL15 cover to RL2 Bumper

3D View




REYN AUDIO


https://en.reynaudio.com/


Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.


| No. | Date | Revision Table | |
|---|---|---|---|
| | | Revision Description | Revised by |
| 1 | | | |
| 2 | | | |
| 3 | | | |
| 4 | | | |
| 5 | | | |
| 6 | | | |
| 7 | | | |
| 8 | | | |


| | | | |
|---|---|---|---|
| Scale | 1:1 | Dimension | mm/inches |
| Referential axis of symmetry | | | |
| Issue Date | 2026. 7. 30 | Version | |

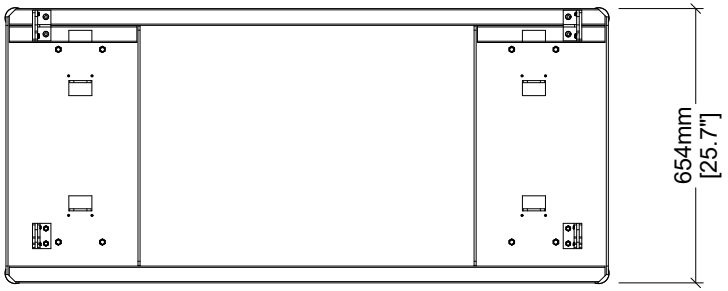




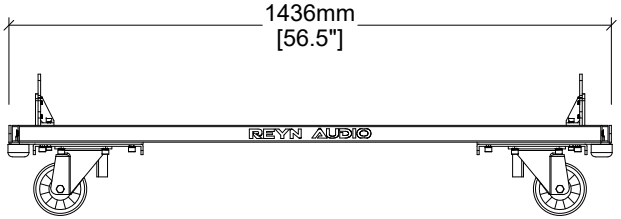

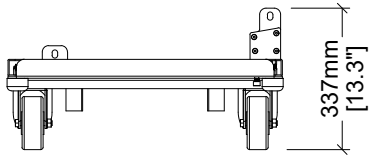
| Technical Specification | |
|---|---|
| Applicable Series | RL15 |
| Specifications | 4 in 1 |
| Net Weight (N.W.) | 53 kg (116.8 lbs) |

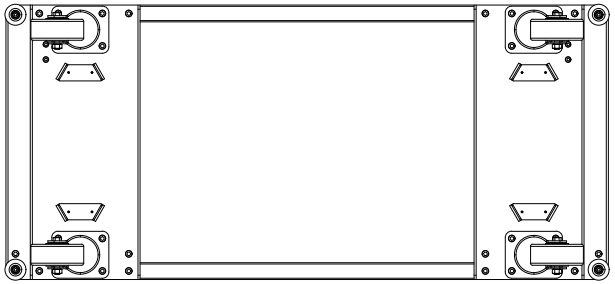REYN AUDIO

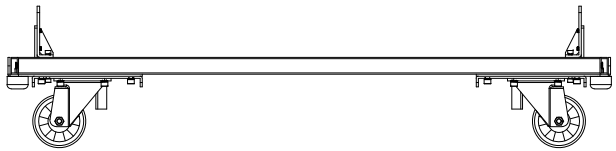Six Orthographic Views of the Product

# RL15 Touring Cart

3D View




REYN AUDIO


https://en.reynaudio.com/


Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.


| No. | Date | Revision Table | |
|---|---|---|---|
| | | Revision Description | Revised by |
| 1 | | | |
| 2 | | | |
| 3 | | | |
| 4 | | | |
| 5 | | | |
| 6 | | | |
| 7 | | | |
| 8 | | | |


| | | | |
|---|---|---|---|
| Scale | 1:1 | Dimension | mm/inches |
| Referential axis of symmetry | | | |
| Issue Date | 2026. 7. 30 | Version | |

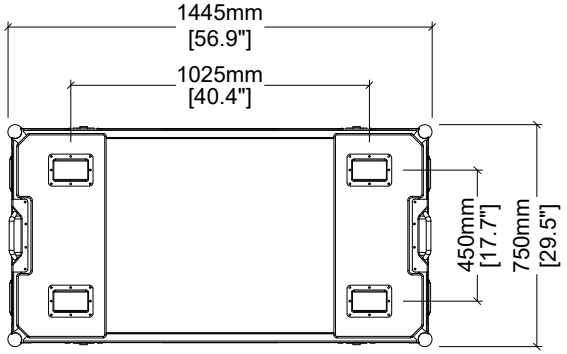




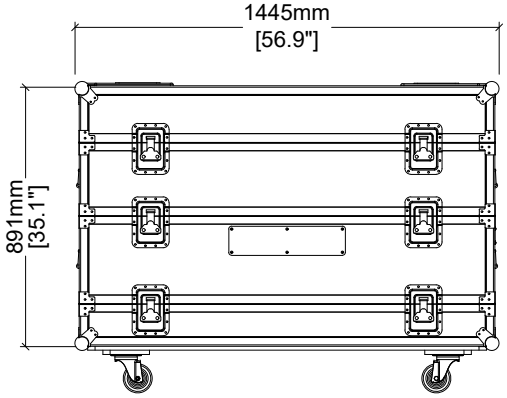

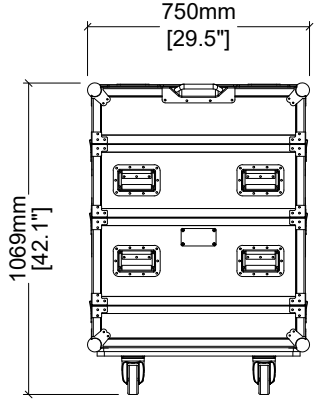
| Technical Specification | |
|---|---|
| Applicable Series | RL15 |
| Specifications | 2 RL15 Bumpers and 2 tri plates |
| Net Weight (N.W.) | 110 kg (242.5 lbs) |
| Gross Weight (G.W.) | 340 kg (749.6 lbs) |

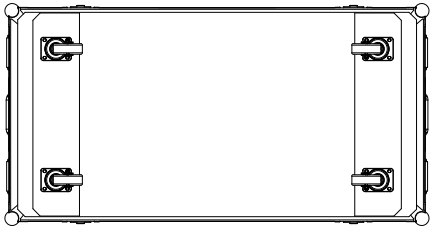REYN AUDIO

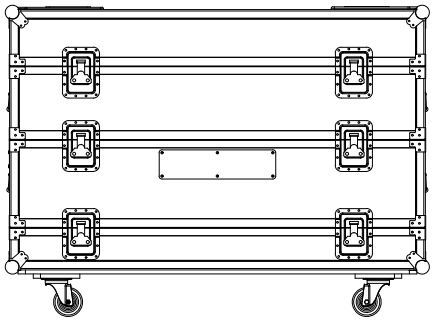Six Orthographic Views of the Product

**RL15 Bumper Flight Case**

3D View




REYN AUDIO

https://en.reynaudio.com/

Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

| No. | Date | Revision Table: Revision Description | Revised by |
|---|---|---|---|
| 1 | | | |
| 2 | | | |
| 3 | | | |
| 4 | | | |
| 5 | | | |
| 6 | | | |
| 7 | | | |
| 8 | | | |

| | | | |
|---|---|---|---|
| Scale | 1:1 | Dimension | mm/inches |
| Referential axis of symmetry | | | |
| Issue Date | 2026. 7. 29 | Version | |

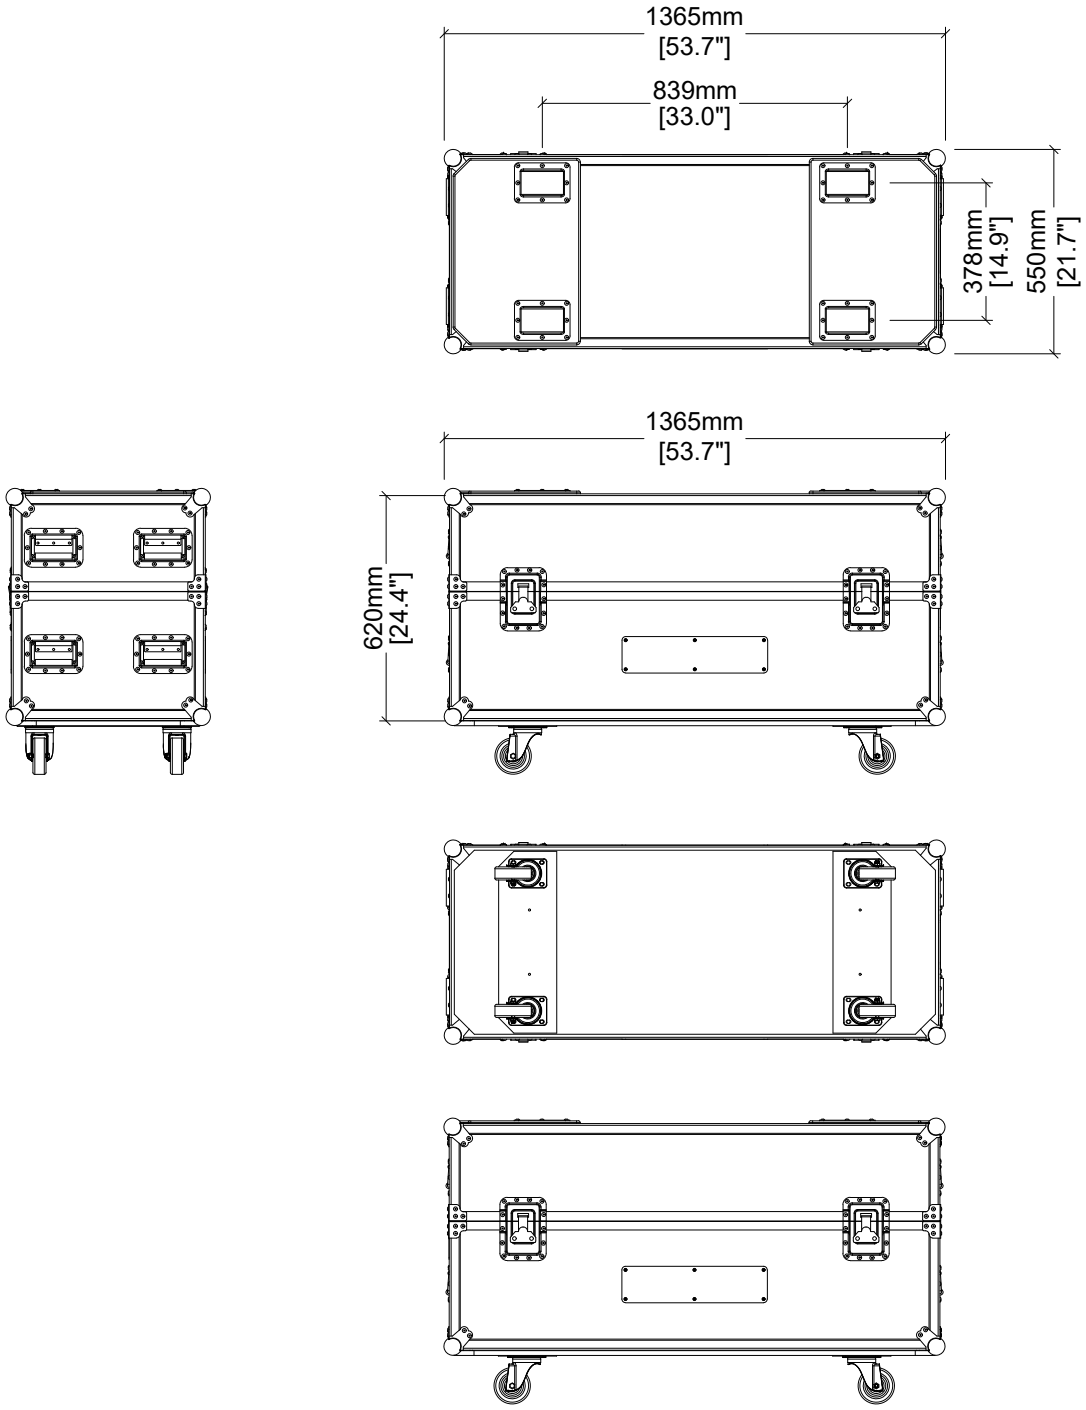



REYN AUDIO

Six Orthographic Views of the Product

# RL15 covert to RL2 Bumper Flight Case

3D View



REYN AUDIO

https://en.reynaudio.com/


Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.


| No. | Date | Revision Table | |
|---|---|---|---|
| | | Revision Description | Revised by |
| 1 | | | |
| 2 | | | |
| 3 | | | |
| 4 | | | |
| 5 | | | |
| 6 | | | |
| 7 | | | |
| 8 | | | |


| Scale | 1:1 | Dimension | mm/inches |
|---|---|---|---|
| Referential axis of symmetry | | | |
| Issue Date | 2026. 7. 30 | Version | |


## Technical Specification


| | |
|---|---|
| Applicable Series | RL15、RL2 |
| Specifications | 2 RL15 to RL2 Bumpers and 2 hoists |
| Net Weight (N.W.) | 56 kg (123.5 lbs) |
| Gross Weight (G.W.) | 104 kg (229.3 lbs) |

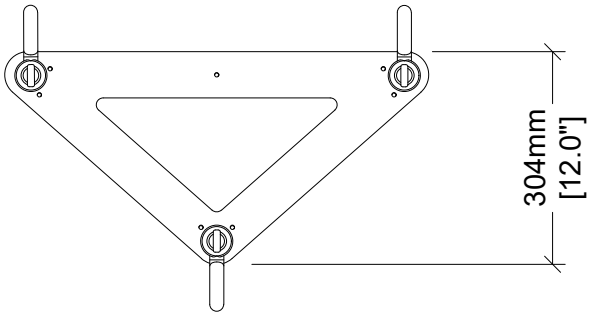




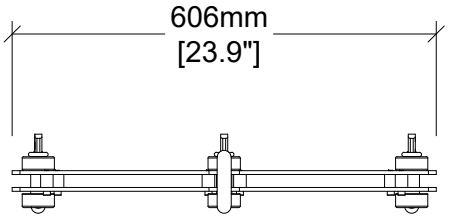
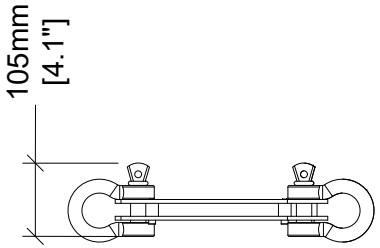
## Technical Specification

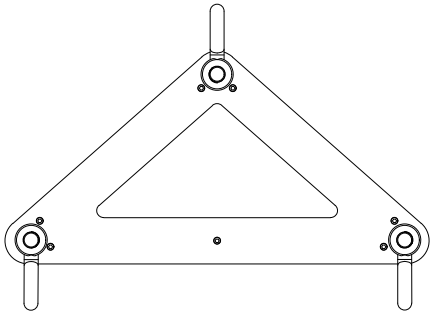
| | |
|---|---|
| Applicable Series | All RL Line Array Series |
| Specifications | Adjust the horizontal angle ofthe line array±10° |
| WLL (Working Load Limit) | 2,350 kg (5180.9 lbs) |
| Safety Factor | 5.8 times |
| TÜV SÜD Test Report No. | 64.190.25.3931.01-00 |
| Rigging Material | Main frame 304 stainless steel |
| Surface Treatment | Black matte-textured powder coating with 10-year outdoor rating |
| Net Weight (N.W.) | 10 kg (22 lbs) |

REYN AUDIO

Six Orthographic Views of the Product

# Tri-Frame

3D View




REYN AUDIO

https://en.reynaudio.com/

Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

| No. | Date | Revision Table: Revision Description | Revised by |
|---|---|---|---|
| 1 | | | |
| 2 | | | |
| 3 | | | |
| 4 | | | |
| 5 | | | |
| 6 | | | |
| 7 | | | |
| 8 | | | |

| | | | |
|---|---|---|---|
| Scale | 1:1 | Dimension | mm/inches |
| Referential axis of symmetry | | | |
| Issue Date | 2026. 7. 30 | Version | |

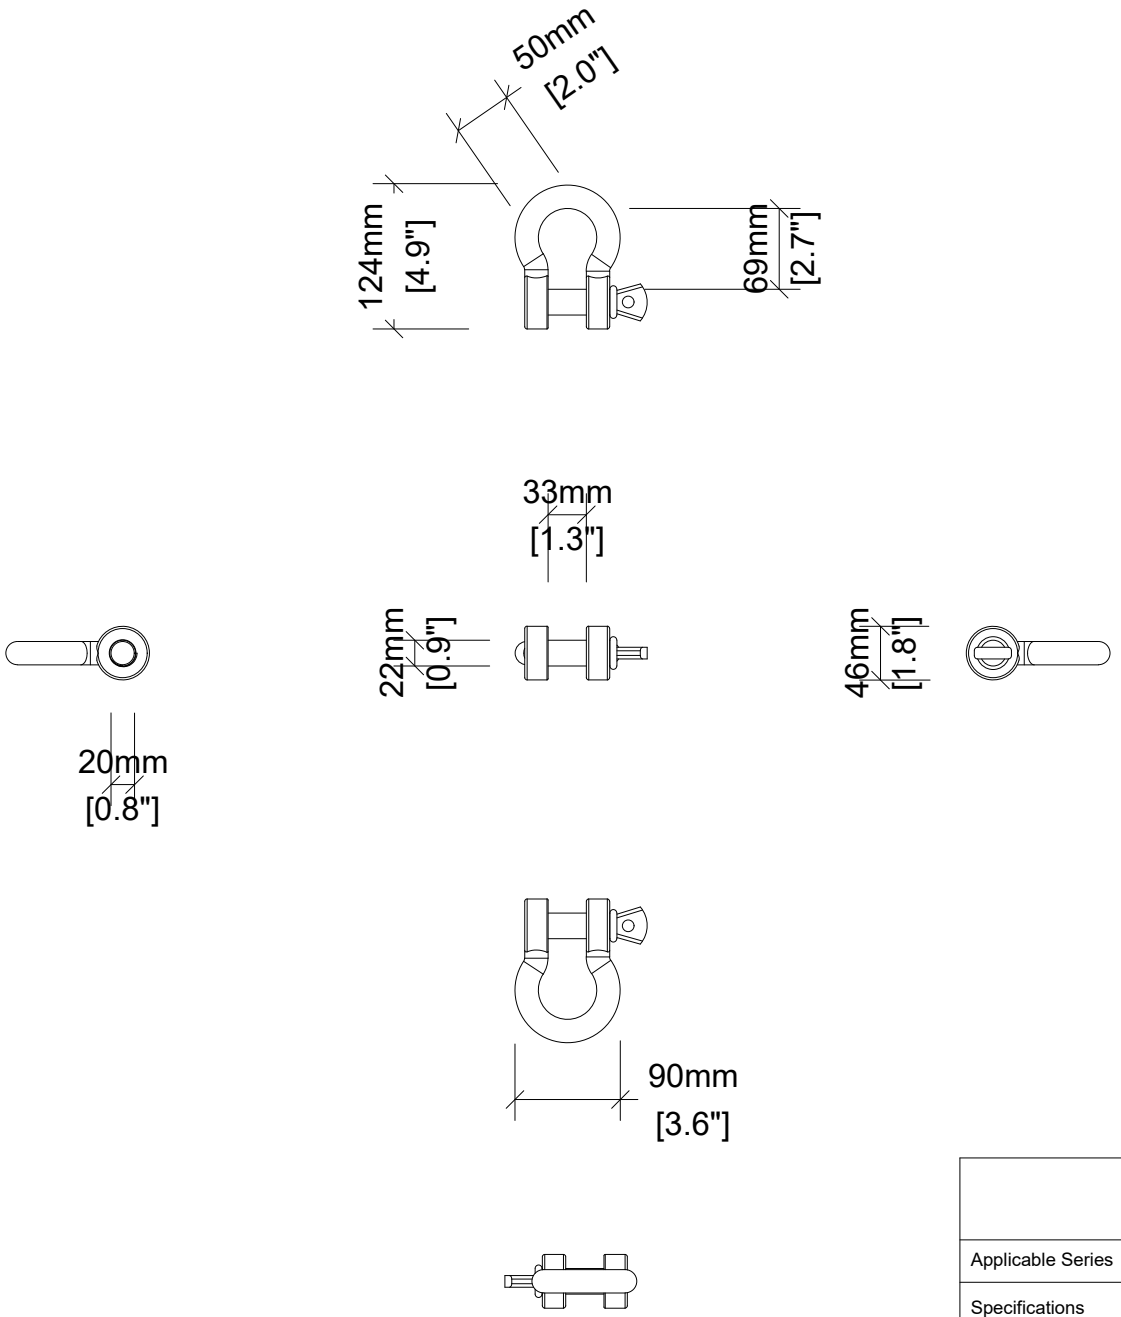


REYN AUDIO

Six Orthographic Views of the Product

# 3/4 Shackle

3D View



REYN AUDIO

https://en.reynaudio.com/

Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

| No. | Date | Revision Table | |
|---|---|---|---|
| | | Revision Description | Revised by |
| 1 | | | |
| 2 | | | |
| 3 | | | |
| 4 | | | |
| 5 | | | |
| 6 | | | |
| 7 | | | |
| 8 | | | |

| | | | |
|---|---|---|---|
| Scale | 1:1 | Dimension | mm/inches |
| Referential axis of symmetry | | | |
| Issue Date | 2026. 7. 30 | Version | |

## Technical Specification

| | |
|---|---|
| Applicable Series | RL1、RL2、RL15、GS218 |
| Specifications | American Bow (BW),<br>G-209 high-quality alloystructural steel |
| WLL (Working Load Limit) | 4.75 t |
| Safety Factor | 6 times |