
REYN AUDIO

COBRA8
RX8

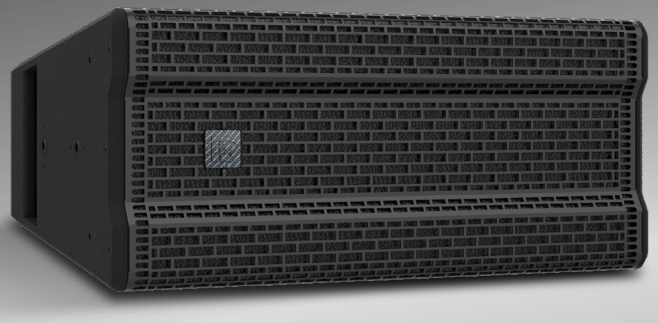

Acoustic Design: Symmetrical Architecture, Superior Sonic Signature

The RX8 features a symmetrical 2-way design with dual 8" LF drivers and a 3" compression driver coupled to a rotatable CD (Constant Directivity) horn. This layout ensures uniform 75° (H) x 40° (V) dispersion. The bass-reflex porting is optimized for extended low-frequency response, balancing clarity with high-dynamic impact.

Structure & Durability: Rigid & Protective

Constructed from high-density birch plywood to minimize resonance, the RX8 is finished in wear-resistant polyurea. Multiple M8 rigging points allow for flexible installation via dedicated brackets.

Application & Expansion: Multi-Scenario Versatility

Suitable for commercial spaces and mid-sized professional setups, it pairs effectively with subwoofers to extend frequency limits and overall system SPL.

70 Hz - 19 kHz
Frequency Response

134 dB
Maximum SPL

2 x 8" (LF)
Transducers

1 x 3" (HF)
Transducers

H 75° (Rotatable)
Directivity

V 40° (Rotatable)
Directivity

15° (Trapezoidal Enclosure - Fixed Angle)
Splay Angle


IP55
IP Rating

16 kg (35.3 lbs)
Net Weight

Technical Specifications:

AES Power Handling	HMF: 400 W	
Program Power	HMF: 800 W	
Nominal Impedance	8 ohm	
Acoustic Modes	LF: Bandpass-loaded	HF: CD horn
Pin Assignment	1+/1-(INPUT) ,2+/2- (Link)	
Connectors	2x4-points Speakon®	
Rigging Hardware	Optional dedicated vertical hanger and dedicated horizontal mounting brackets	
Cabinet Coating	All-birch plywood with black polyurea wear-resistant finish	
Rigging Points	M10 (Quick-lock rigging point)	M8 (Fixed rigging point)
Dimensions (W x H x D) mm	578x257x343 mm (22.8"x10.1"x13.5")	
Product Code	12322500208376	

Dimensional Drawing:

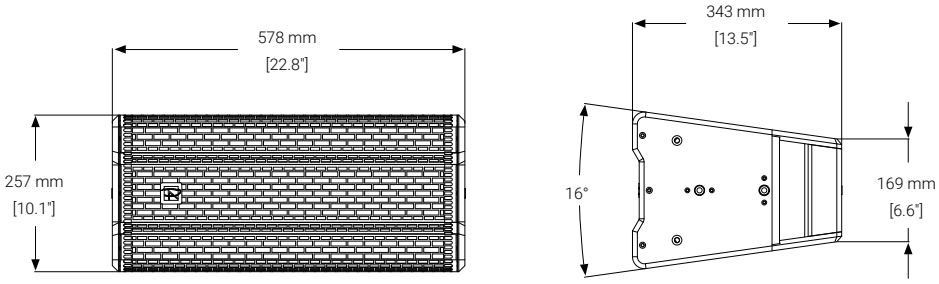

Copyright © ReynAudio. All rights reserved. Product information is subject to change without prior notice.