




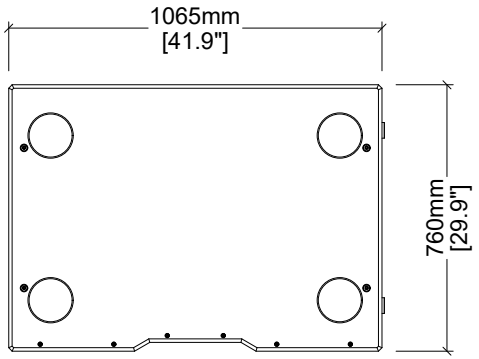




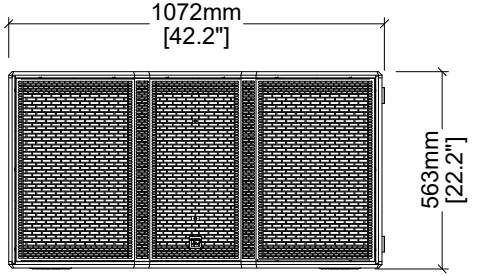



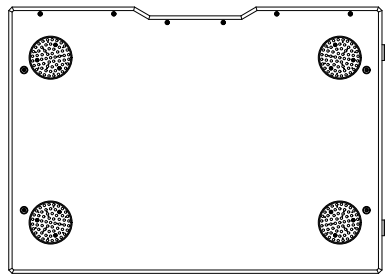

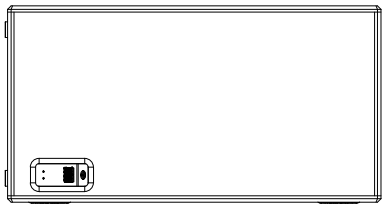


Technical Specification	
Maximum SPL	140 dB
Low-frequency Limit (-10 dB)	32 Hz
Directivity	standard or cardioid
AES Power Handling	2000W
Nominal Impedance	4 ohm
Transducers	2x18" neodymium
Pin Assignment	1+/1- (LF) ,2+/2- (Link)
Splay Angles	Square Enclosure, Fixed Angle
IP Rating	IP55
Net Weight	84 kg (185.2 lbs)

REYN AUDIO

Six Orthographic Views of the Product

K218

3D View



REYN AUDIO

https://en.reynaudio.com/

Copyright Notice This drawing is exclusive to Foshan YiFeng Electric Industrial Co., Ltd. No reproduction, application, or disclosure without prior permission.

No.	Date	Revision Table	
		Revision Description	Revised by
1			
2			
3			
4			
5			
6			
7			
8			

Scale	1:1	Dimension	mm/inches
Referential axis of symmetry			
Issue Date	2026. 9. 28	Version	