

RL4 Directivity Pattern

The diagrams below show the horizontal dispersion angle of the RL4 speaker at different frequencies. These plots are generated using lines of equal sound pressure.
Gray: -6 dB
Black: -12 dB
With the horn set to 90°, as shown below:

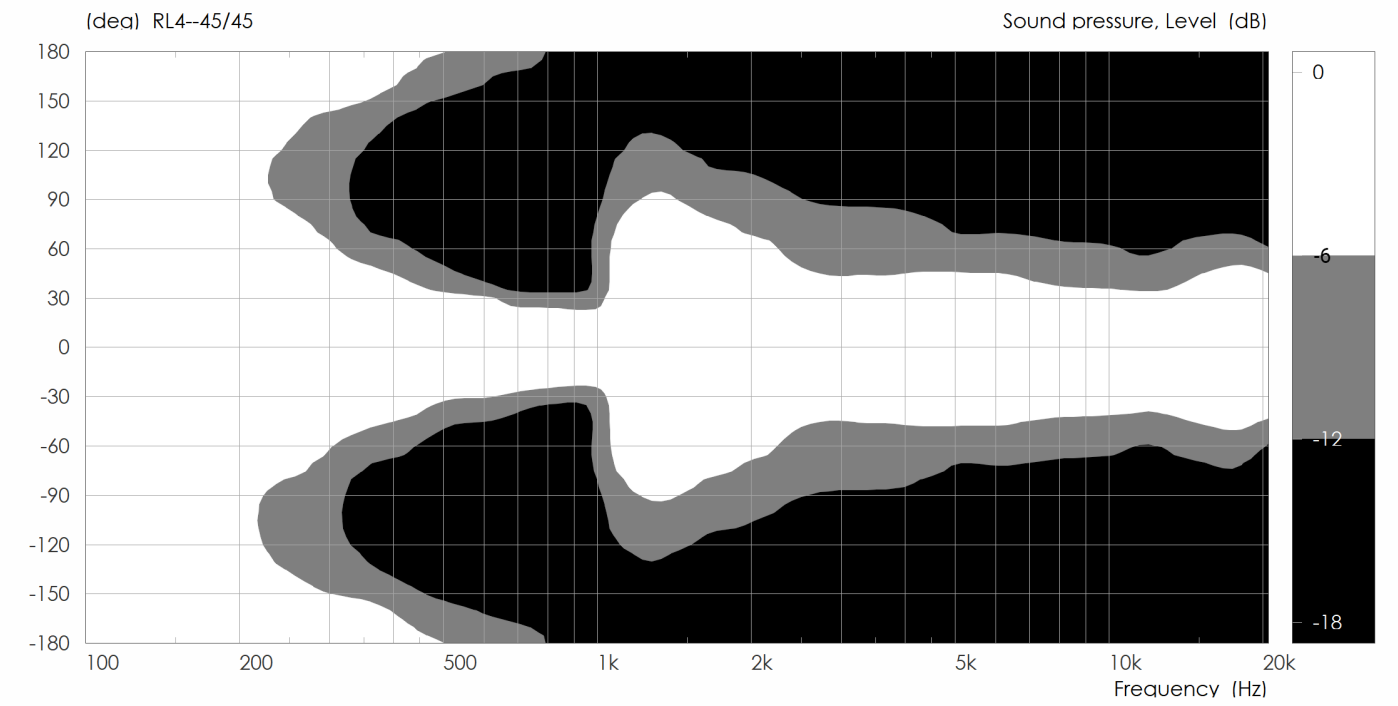

With the horn set to 110°, as shown below:

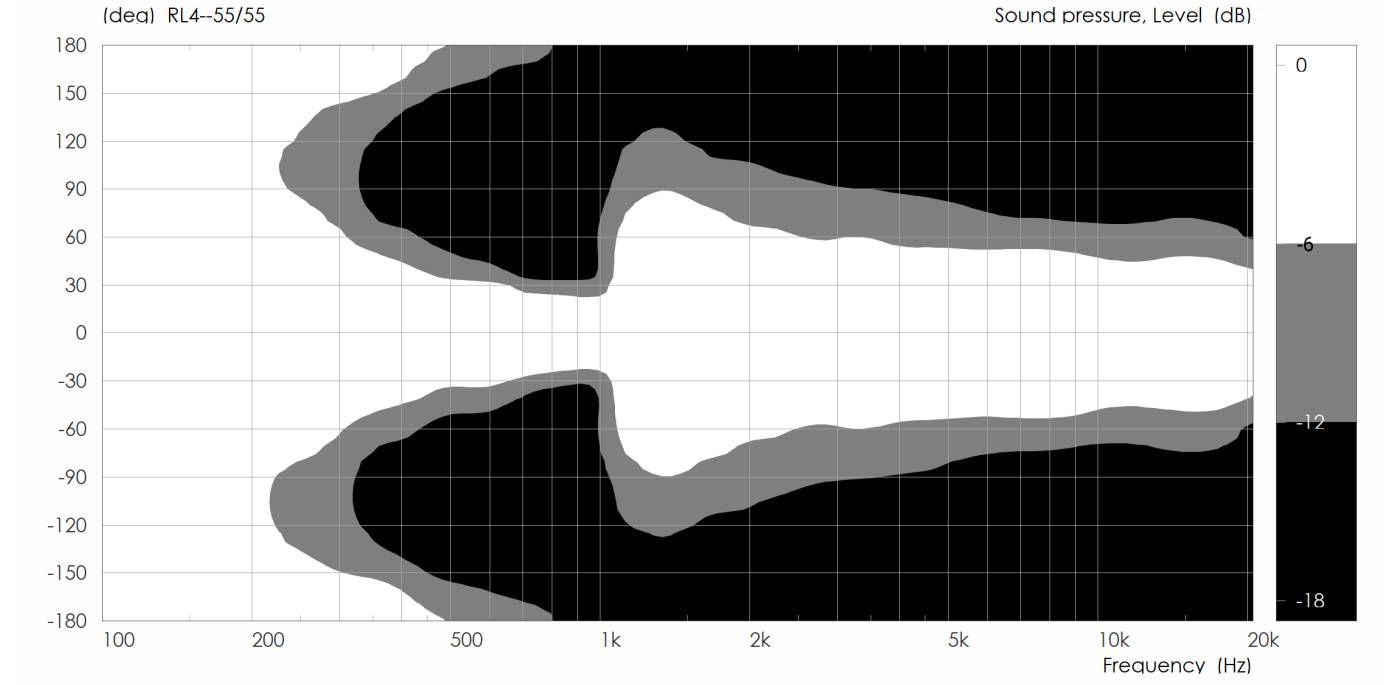

RL4 Frequency Response Curve

The chart below shows the frequency response curve of the RL4 speaker.
Frequency Response (-5 dB): 60 Hz – 20 kHz
Maximum SPL (@1 m): 139 dB

